CS

CONTRACTOR SELECT™

Everyday Lighting **Done Right**™

Right Products. Readily Available. Trusted Performance.

LITHONIA LIGHTING

JUNO

sensorswitch

IOTA

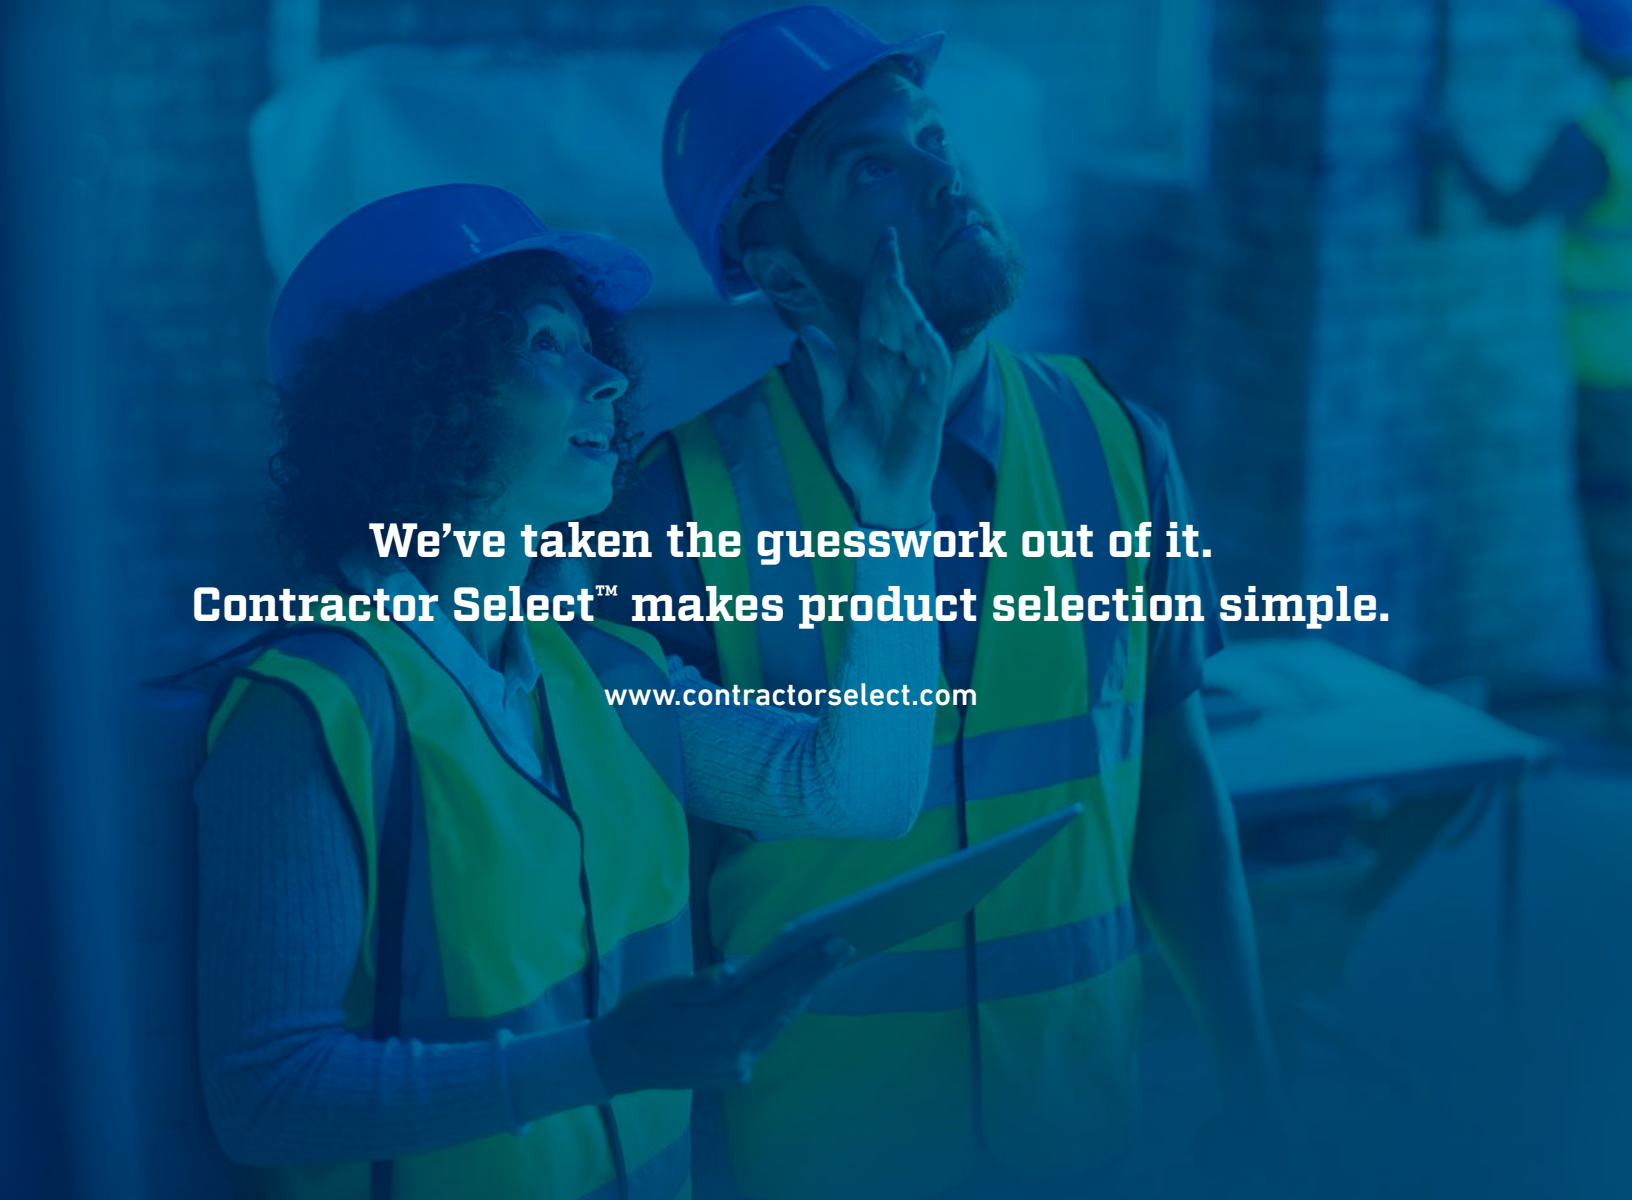
We've taken the guesswork out of it.
Contractor Select™ makes product selection simple.
www.contractorselect.com

When you need to grab and go and feel confident in your purchase decision, choose a Contractor Select™ product from one of our trusted brands, Lithonia Lighting®, Juno®, IOTA® and Sensor Switch®.

Right Products. Contractor Select products are our most popular products for the most common projects – perfect for those everyday lighting jobs. They have the right combination of features, performance and efficiency to get the job done right.

Readily Available. With inventory available through your preferred authorized distributor or retailer, Contractor Select helps you stay on schedule. For larger projects, we have these products in stock and available for same-day shipment from one of our six North American distribution centers.

Trusted Performance. We know your reputation is important to you, and we are proud of ours, too. Have peace of mind in your selection knowing Contractor Select products are backed by Lithonia Lighting®, Juno®, IOTA® and Sensor Switch®, the trusted brands of professionals for over 75 years.

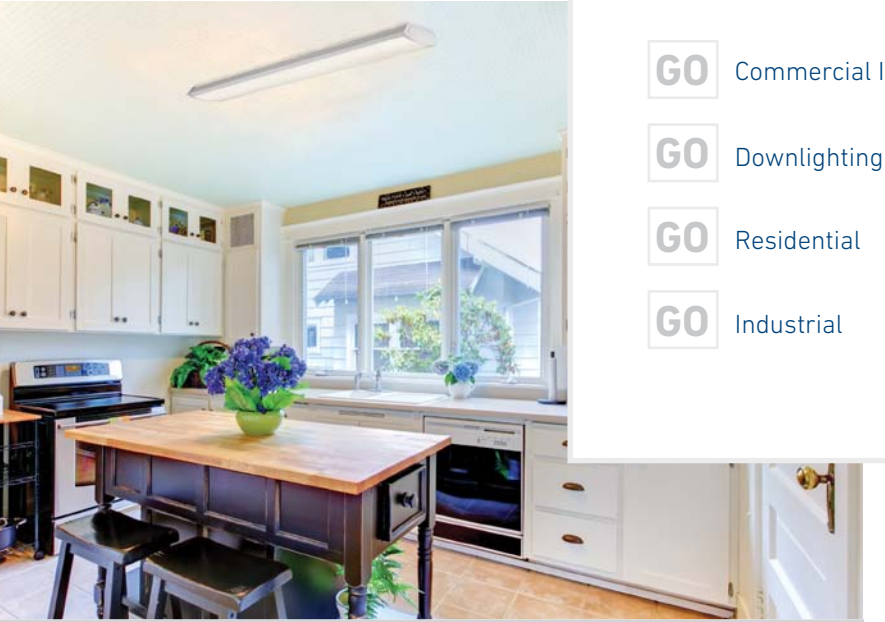

Table of

Contents

GO Commercial Indoor

GO Downlighting

GO Residential

GO Industrial

GO Exit & Emergency

GO Outdoor

GO Controls

GO Tools and Resources

Our most popular
products for your most
common projects.

Commercial Indoor

Lithonia Lighting®

CPX™

LED Panel

CPX™ from Lithonia Lighting is the perfect choice for a quality LED panel at an affordable price. The smooth, even lens projects a crisp and clean aesthetic. CPX is available in static or switchable options for further flexibility and is the perfect choice for budget-conscious school, commercial office, or small footprint retail projects.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
CPX 2X2 3200LM 35K M4	191848338537	2'x2' Flat Panel	2 Lamp 17W T8	3,200	30W	3500K	80	120-277V	White	40
CPX 2X2 3200LM 40K M4	191848338650	2'x2' Flat Panel	2 Lamp 17W T8	3,200	30W	4000K	80	120-277V	White	40
CPX 2X2 3200LM 50K M4	193048313642	2'x2' Flat Panel	2 Lamp 17W T8	3,200	30W	5000K	80	120-277V	White	40
CPX 2X4 4000LM 35K M2	191848338490	2'x4' Flat Panel	2 Lamp 32W T8	4,000	40W	3500K	80	120-277V	White	20
CPX 2X4 4000LM 40K M2	191848338506	2'x4' Flat Panel	2 Lamp 32W T8	4,000	40W	4000K	80	120-277V	White	20
CPX 2X4 4000LM 50K M2	193048313680	2'x4' Flat Panel	2 Lamp 32W T8	4,000	40W	5000K	80	120-277V	White	20
CPX 1X4 ALO7 SWW7 M4	194994568063	1'x4' Switchable Panel	2 Lamp 32W T8	*	*	3500/4000/5000K	80	120-277V	White	40
CPX 2X2 ALO7 SWW7 M4	193048542806	2'x2' Switchable Panel	2 Lamp 32W T8	*	*	3500/4000/5000K	80	120-277V	White	40
CPX 2X4 ALO8 SWW7 M2	193048542844	2'x4' Switchable Panel	3 Lamp 32W T8	*	*	3500/4000/5000K	80	120-277V	White	20

*Please see spec sheet on Lithonia.com for switchable CCT and ALO table for full range of options.

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

CPANL™

LED Switchable Lumen Flat Panel

CPANL offers the ultimate in mounting flexibility and lumen options. The integrated driver and rigid, deep-drawn housing allow this low-profile panel to suspend, mount directly to the surface, or integrate in a recessed ceiling. The Switchable Lumen feature adds to the versatility of CPANL, providing three panel solutions in one. CPANL is suitable for both new construction and renovation for applications such as schools, commercial offices, retail and healthcare applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
CPANL 2X2 24/33/44LM 35K M4	191848338278	2'x2' Flat Panel	2 Lamp 32W T8	2,400/3,300/4,400	20/28/39W	3500K	>80	120-277V	56
CPANL 2X2 24/33/44LM 40K M4	191848338322	2'x2' Flat Panel	2 Lamp 32W T8	2,400/3,300/4,400	20/28/39W	4000K	>80	120-277V	56
CPANL 2X4 40/50/60LM 35K M2	191848338001	2'x4' Flat Panel	3 Lamp 32W T8	4,000/5,000/6,000	32/42/52W	3500K	>80	120-277V	28
CPANL 2X4 40/50/60LM 40K M2	191848338230	2'x4' Flat Panel	3 Lamp 32W T8	4,000/5,000/6,000	32/42/53W	4000K	>80	120-277V	28

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

GTL

LED Lensed Lay-in

GTL is a recessed LED Lay-in that provides a general ambient lighting solution for grid ceilings. GTL is ideal for a broad range of applications where a direct fluorescent lighting replacement is needed, including offices, schools and commercial spaces.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
2GTL2 3300LM LP835	889804702637	2'x2' LED Lay-in	2 U-Bent 32W T8	3,300	28W	3500K	82	120-277V	56
2GTL2 3300LM LP840	889804702460	2'x2' LED Lay-in	2 U-Bent 32W T8	3,300	28W	4000K	82	120-277V	56
2GTL4 4400LM LP835	889804706598	2'x4' LED Lay-in	2 Lamp 32W T8	4,400	34W	3500K	82	120-277V	28
2GTL4 4400LM LP840	889804706956	2'x4' LED Lay-in	2 Lamp 32W T8	4,400	34W	4000K	82	120-277V	28
2GTL4 A12 120 LP840	889804351620	2'x4' LED Lay-in	2 Lamp 32W T8	4,000	29W	4000K	82	120V	28

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

BLC

LED Center-Basket Lay-in

The BLC Lay-in delivers soft, ambient lighting in a popular center-basket design. The slim profile and energy-saving LED technology make BLC the ideal choice for renovation or new construction.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
BLC 2X2 3300LM 35K ADSM	193048323177	2'x2' Center Basket Lay-in with Round Lens	2 Lamp 17W T8	3,300	32W	3500K	80	120-277V	52
BLC 2X2 3300LM 40K ADSM	193048323269	2'x2' Center Basket Lay-in with Round Lens	2 Lamp 17W T8	3,300	32W	4000K	80	120-277V	52
BLC 2X4 4000LM 35K	191848536575	2'x4' Center Basket Lay-in with Square Lens	2 Lamp 32W T8	4,000	37W	3500K	80	120-277V	26
BLC 2X4 4000LM 35K ADSM	193048323443	2'x4' Center Basket Lay-in with Round Lens	2 Lamp 32W T8	4,000	37W	3500K	80	120-277V	26
BLC 2X4 4000LM 40K	191848536629	2'x4' Center Basket Lay-in with Square Lens	2 Lamp 32W T8	4,000	37W	4000K	80	120-277V	26
BLC 2X4 4000LM 40K ADSM	193048323511	2'x4' Center Basket Lay-in with Round Lens	2 Lamp 32W T8	4,000	37W	4000K	80	120-277V	26
BLC 2X4 5000LM 35K	191848536636	2'x4' Center Basket Lay-in with Square Lens	2 Lamp 32W T8	5,000	49W	3500K	80	120-277V	26
BLC 2X4 5000LM 40K	191848536599	2'x4' Center Basket Lay-in with Square Lens	2 Lamp 32W T8	5,000	49W	4000K	80	120-277V	26

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

RLNK

RLNK Linkable LED Strip

RLNK LED linkable strip light provides smooth end-to-end illumination. Easily create continuous rows by linking multiple fixtures together with included accessories.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Distribution	Pallet Quantity
RLNK L24 120 35K 80CRI M4	194994373230	2ft Linkable LED Strip Light	1 Lamp Fluorescent 32W	940	8.9	3500K	120	General	240
RLNK L48 120 35K 80CRI M4	194994373308	4ft Linkable LED Strip Light	1 Lamp Fluorescent 32W	1,950	19.7	3500K	230	General	200

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

MNSL

LED Strip Light

The basic, non-dimming, damp location MNSL strip light, mounts to the ceiling or wall individually or in continuous rows. The fixture can be mounted both horizontally and vertically. For the latest listings, visit www.energystar.gov.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Distribution	Pallet Quantity
MNSL L23 1LL MVOLT 40K 80CRI	193048379051	2' 1-Light LED Strip Light	1 Lamp T8	1,250	11W	4000K	120-277V	General	576
MNSL L24 2LL MVOLT 40K 80CRI	190887018707	2' 2-Light LED Strip Light	2 Lamp T8	2,500	20W	4000K	120-277V	General	336
MNSL L46 1LL MVOLT 40K 80CRI	191723219845	4' 1-Light LED Strip Light	1 Lamp T8	2,500	20W	4000K	120-277V	General	288
MNSL L48 2LL MVOLT 40K 80CRI	190887018776	4' 2-Light LED Strip Light	2 Lamp T8, 1 Lamp T5HO, 70W HID	4,500	35W	4000K	120-277V	General	192
MNSL L96 2LL MVOLT 40K 80CRI	190887018844	8' 2-Light LED Strip Light	4 Lamp T8, 2 Lamp T5HO	9,000	73W	4000K	120-277V	General	98

Lithonia Lighting®

CDS

LED Dual Strip Light

The light-duty, dimmable, damp-location and DLC® listed CDS LED dual strip light, can be mounted to the ceiling or wall both individually and in a continuous row. The size and versatility make this fixture suitable for tight spaces and task lighting in restrooms, storage closets and under and over cabinets.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Distribution	Pallet Quantity
CDS L48 MVOLT DM 35K 80CRI WH	190887798975	4' Dimming LED Dual Strip	2 Lamp 32W T8	4,200	38W	3500K	120-277V	General	102
CDS L48 MVOLT DM 40K 80CRI WH	190887798876	4' Dimming LED Dual Strip	2 Lamp 32W T8	4,200	38W	4000K	120-277V	General	102
CDS L48 MVOLT DM 50K 80CRI WH	191723036480	4' Dimming LED Dual Strip	2 Lamp 32W T8	4,200	38W	5000K	120-277V	General	102
CDS L96 MVOLT DM 35K 80CRI WH	190887799033	8' Dimming LED Dual Strip	4 Lamp 32W T8	9,000	77W	3500K	120-277V	General	90
CDS L96 MVOLT DM 40K 80CRI WH	190887798944	8' Dimming LED Dual Strip	4 Lamp 32W T8	9,000	77W	4000K	120-277V	General	90
CDS L96 MVOLT DM 50K 80CRI WH	191723036497	8' Dimming LED Dual Strip	4 Lamp 32W T8	9,000	77W	5000K	120-277V	General	90

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

CSS

LED Adjustable Lumen and Switchable White Strip Light

With switchable white and adjustable lumen technology, the CSS offers the ultimate versatility for many commercial and residential applications. The CSS is a light-duty, dimmable, damp location, DLC listed LED single strip light that can easily mount to a ceiling or wall either individually or in a continuous row.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Distribution	Pallet Quantity
CSS L48 ALO3 MVOLT SWW3 80CRI	193048852677	4' Adjustable Lumen/Switchable White LED Strip Light	2 Lamp 32W T8	3,200/4,300/5,200	24W/34W/39W	3500K/4000K/5000K	120-277V	General	98
CSS L96 ALO4 MVOLT SWW3 80CRI	193048852738	8' Adjustable Lumen/Switchable White LED Strip Light	4 Lamp 32W T8	6,400/8,600/10,600	48W/68W/79W	3500K/4000K/5000K	120-277V	General	102

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

CSS

LED Single Strip Light

The standard CSS is a light-duty, dimmable, damp location and DLC® listed LED single strip light, ready for both commercial and residential applications. It can easily mount to a ceiling or wall both individually and in a continuous row. The size and versatility make it suitable for tight spaces and task lighting in restrooms, storage closets and under or over cabinets.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Distribution	Pallet Quantity
CSS L48 4000LM MVOLT 40K 80CRI	193048852622	4' Dimming LED Strip	2 Lamp 32W T8	4,300	34W	4000K	120-277V	General	98
CSS L96 8000LM MVOLT 40K 80CRI	193048852721	8' Dimming LED Strip	4 Lamp 32W T8	8,600	68W	4000K	120-277V	General	102

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Our most popular
configurations — available
when you need them.

Downlighting

Lithonia Lighting®

LBR8

8" LED Retrofit and Remodel Downlight

The 8-inch LBR offers a seamless install-from-below design and abundant energy savings while maintaining glare-free aesthetics. With a broad offering of aperture sizes, drivers, accessories and switchable CCTs and lumens, LBR is the perfect solution for any renovation project.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
LBR8 ALO2 SWW1 AR LSS MWD MVOLT UGZ QDS	194994827757	8" Retrofit, switchable CCT/ lumens, quick disconnects	1/42TRT or 2/26TRT	1,000-1,500-2,000	13-19-25W	3000-3500-4000-5000K	80	MVOLT (120-277V)	Clear	180

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Downlighting

Juno®

IC23 LEDT24

6" Housings for LED Retrofit Trims

The IC23 LEDT24 6" dedicated LED housing for use with Juno retrofit LED trim modules offers an energy-efficient, Air-Loc® sealed housing that stops exfiltration and infiltration of air, while reducing heating and cooling costs without extra gaskets. The IC-rated housing can also be completely covered with insulation. The IC23 LEDT24 is suitable for ceilings up to 1" thick.

Ordering Information

Catalog Number	UPC	Description	Socket	Voltage	Pallet Quantity
IC23 LEDT24	661209311061	6" New Construction IC Housing for LED Retrofit Trims	Quick Connector (No Socket)	120V	120

Juno®

6RLD

6" LED Retrofit Trim Modules

The LED trim modules offer fast, retrofit installation in most medium base 6" housings using the included socket whip adapter and quick connect. They can also be installed directly into dedicated Juno 6" LED housings. The modules are dimmable down to 5% with a rated service life of 50,000 hours while providing many years of maintenance-free operation that delivers an exceptionally accurate color rendering of 90+ CRI.

Ordering Information

Catalog Number	UPC	Description	Finish	Dimming Protocol	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
6RLD G4 07LM 27K 90CRI 120 FRPC WWH M6	194994892953	6" Downlight Retrofit Trim	White	Forward & Reverse Phase Cut	65W Incandescent	700	8W	2700K	90	120V	270
6RLD G4 07LM 30K 90CRI 120 FRPC WWH M6	194994892991	6" Downlight Retrofit Trim	White	Forward & Reverse Phase Cut	65W Incandescent	700	8W	3000K	90	120V	270
6RLD G4 10LM 27K 90CRI 120 FRPC WWH M6	194994893011	6" Downlight Retrofit Trim	White	Forward & Reverse Phase Cut	75W Incandescent	1,000	12W	2700K	90	120V	240
6RLD G4 10LM 30K 90CRI 120 FRPC WWH M6	194994893035	6" Downlight Retrofit Trim	White	Forward & Reverse Phase Cut	75W Incandescent	1,000	12W	3000K	90	120V	300

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

IC23 Series

6" Incandescent Line-Voltage Housing

The IC23 standard universal incandescent downlight with floating socket is optimized for the quickest possible attachment to enclosed and adjustable style trims. It features an energy-efficient Air-Loc® seal to stop infiltration and exfiltration of air, reducing heating and cooling costs. The IC-rated housing can also be completely covered with insulation. The IC23 is suitable for ceilings up to 1" thick.

Ordering Information

Catalog Number	UPC	Description	Socket	Voltage	Pallet Quantity
IC23 W	661209068613	6" No Socket Plate New Construction IC Housing with Push-In Electrical Connectors	E26 Screw Shell	120V	120
IC23 W G	661209559104	6" No Socket Plate New Construction IC Housing with Push-In Electrical Connectors and Pre-Installed Air-Loc Gasket	E26 Screw Shell	120V	120

250 WH

V3034(T) WWH

V3040N PW

Juno®

6" Trims

Compatible with IC23 Housings

Baffle trims are the perfect option to reduce glare and minimize ceiling brightness. Open trims are designed to provide a uniform distribution of light. Lensed shower trims are wet location listed.

Ordering Information

Catalog Number	UPC	Description	Finish	Trim OD	Pallet Quantity
Juno Trims					
250 WH	661209700773	6" BR30 Open Frame Downlight Trim	White	7 5/8"	768
Juno VuLite® Trims					
V3034 WWH	661209044730	6" Fully Enclosed Downlight Baffle Trim	White Baffle, White Trim Ring	7 5/8"	1152
V3034T WWH	661209018359	6" Fully Enclosed Downlight Baffle Trim with Torsion Springs	White Baffle, White Trim Ring	7 5/8"	576
V3040N PW	661209317469	6" Stippled Opal Lens Shower Trim with Internal Reflector	Plastic White (Polycarbonate Material Shower Trim)	8"	288

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

IC22 | IC22R

6" Incandescent Line-Voltage Housings

The IC-Rated incandescent downlights can be completely covered with insulation and feature an energy-efficient Air-Loc® seal to stop infiltration and exfiltration of air, reducing heating and cooling costs. The IC22 standard universal downlight is suitable for ceilings up to 1" thick and the IC22R remodel downlight can be installed from below the ceiling.

IC22

IC22R

Ordering Information

Catalog Number	UPC	Description	Socket	Voltage	Pallet Quantity
IC22	661209700216	6" New Construction IC Housing	E26 Screw Shell	120V	120
IC22 W	661209067739	6" New Construction IC Housing with Push-In Electrical Connectors	E26 Screw Shell	120V	120
IC22 W G	661209559074	6" New Construction IC Housing with Push-In Electrical Connectors and Pre-Installed Air-Loc Gasket	E26 Screw Shell	120V	120
IC22R	661209017673	6" Remodel IC Housing	E26 Screw Shell	120V	180

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

250 WH

24 WWH

V3024 WWH

V3034(T) WWH

V3040N PW

Juno®

6" Trims

Compatible with IC22/IC22R Housings

Baffle trims are the perfect option to reduce glare and minimize ceiling brightness while open trims are designed to provide a uniform distribution of light. Lensed shower trims are wet location listed.

Ordering Information

Catalog Number	UPC	Description	Finish	Trim OD	Pallet Quantity
Juno Trims					
24 WWH	661209950215	6" Downlight Tapered Baffle Trim	White Baffle, White Trim Ring	7 5/8"	756
250 WH	661209700773	6" BR30 Open Frame Downlight Trim	White	7 5/8"	768
Juno VuLite® Trims					
V3024 WWH	661209017307	6" Downlight Tapered Baffle Trim	White Baffle, White Trim Ring	7 3/4"	1440
V3034 WWH	661209044730	6" Fully Enclosed Downlight Baffle Trim	White Baffle, White Trim Ring	7 5/8"	1152
V3034T WWH	661209018359	6" Fully Enclosed Downlight Baffle Trim with Torsion Springs	White Baffle, White Trim Ring	7 5/8"	864
V3040N PW	661209317469	6" Stippled Opal Lens Shower Trim with Internal Reflector	Plastic White (Polycarbonate Material Shower Trim)	8"	288

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

LDN6

6" LED Open and Wallwash New Construction Downlight

The Lithonia Lighting 6-inch LDN housings, for use with LDN6 trims, provide general illumination solutions for commercial-grade downlight applications. With 55° cutoff and deep source regression, LDN provides a glare-free, quiet ceiling without compromising on efficacy (85+LPW typical).

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
LDN6 35/10 MVOLT GZ10 HSG	193048377323	6" New Construction Non-IC LED Housing, 1000lm, 10% 0-10V dimming	26W CFL	1,000	11W	3500K	80	120-277V	84
LDN6 35/15 MVOLT GZ10 HSG	193048375787	6" New Construction Non-IC LED Housing, 1500lm, 10% 0-10V dimming	32W CFL	1,500	18W	3500K	80	120-277V	84
LDN6 35/20 MVOLT GZ10 HSG	193048380026	6" New Construction Non-IC LED Housing, 2000lm, 10% 0-10V dimming	42W CFL	2,000	22W	3500K	80	120-277V	84

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

LO6AR

LW6AR

Lithonia Lighting®

LDN6 Trims

Compatible with LDN6 Housings

The Lithonia Lighting 6-inch LDN trims, for use with LDN6 housings, provide general illumination solutions for commercial-grade downlight applications. LDN is available with 1.0 spacing criteria for downlight along with a complementary asymmetric wallwash distribution and 0-10V dimming down to 10%.

Ordering Information

Catalog Number	UPC	Description	Pallet Quantity
LO6AR LSS TRIM	745972691619	6" Open reflector with clear, semi-specular finish	180
LW6AR LSS TRIM	190887157093	6" Open wallwash with clear, semi-specular finish	180

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

L7X | L7XR

6" Incandescent Line-Voltage Housings

Approved for all direct burial in insulation and all ceiling and wiring types, these 6" recessed incandescent housings are rated IC/Non-IC for 2'x8' new construction (L7X) or remodel (L7XR) applications. The L7X/L7XR are suitable for ceilings up to 1-1/2" thick.

Ordering Information

Catalog Number	UPC	Description	Lamp Source	Voltage	Socket	Pallet Quantity
L7X R6	784231091906	6" New Construction Housing	Incandescent	120V	E26 Screw Shell	120
L7XR R6	745973789704	6" Remodel Housing	Incandescent	120V	E26 Screw Shell	144

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

7B2W TOR

C01

Lithonia Lighting®

6" Trims

Compatible with L7X/L7XR Housings

Baffle trims are the perfect option to reduce glare and minimize ceiling brightness. Eyeball trims are ideal for accenting objects. Open trims are designed to provide a uniform distribution of light.

Ordering Information

Catalog Number	UPC	Description	Flange Range	Fits Shallow	Finish	Lamp Included	Pallet Quantity
7B2W TOR R24	745975231416	6" Baffle Trim	Narrow	No	White	No	576
C01 R6	745973753095	6" Open Trim	Wide	Yes	White	No	450

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

E Series

5"/6" Switchable White LED Retrofit Module

The 5"/6" recessed LED module is the most economical means to create a well lit environment with exceptional energy efficiency and near zero maintenance. The Switchable White feature provides high-quality light output, efficiency, and features a switch for easy color temperature adjustment, while eliminating the need for recessed housings. Ability to change between 2700K, 3000K, 3500K, 4000K or 5000K color temperatures with the flip of a switch and cater to the needs of a space; 90+ CRI. Great for retrofit into existing downlight cans or new construction and remodel applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
65BEMW SWW5 90CRI M6	194994160564	5/6" LED Baffle Trim Module with Switchable White	65W Incandescent	840	10.3W	2700K/3000K/3500K 4000K/5000K	90	120V	White	360
65BEMW HL SWW5 90CRI M6	194994244950	5/6" LED Baffle Trim Module with Switchable White	120W Incandescent	1,200	13.9W	2700K/3000K/3500K 4000K/5000K	90	120V	White	270
65SEMW SWW5 90CRI M6	194994825197	5/6" LED Smooth Trim Module with Switchable White	75W Incandescent	900	10.5W	2700K/3000K/3500K 4000K/5000K	90	120V	White	216

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

E Series

5"/6" LED Module with Baffle Trim

The economical E Series LED downlight with baffle trim and adjustable torsion springs fits most manufacturers' 5" and 6" recessed can-style housings. It can be dimmed down to 10% and maintains 70% light output after 35,000 hours of use. This is a perfect application for multi-family residences, retail shops and office spaces. An E26 adapter is included.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
65BEMW LED 27K 90CRI M6	190887266672	5"/6" LED Module with Baffle Trim	65W Incandescent	750	12.1W	2700K	90	120V	White	300
65BEMW LED 30K 90CRI M6	190887266634	5"/6" LED Module with Baffle Trim	65W Incandescent	835	11.9W	3000K	90	120V	White	300
65BEMW LED 40K 90CRI M6	190887266696	5"/6" LED Module with Baffle Trim	65W Incandescent	845	11.9W	4000K	90	120V	White	300
65BEMW HL LED 30K 90CRI M6	193047859394	5/6" LED Module with Baffle Trim	75W Incandescent	1,200	13.8W	3000K	90	120V	White	360

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

E Series

5"/6" LED Module with Smooth Trim

The economical E Series LED downlight with baffle trim and adjustable torsion springs fits most manufacturers' 5" and 6" recessed can-style housings. It can be dimmed down to 10% and maintains 70% light output after 35,000 hours of use. This is a perfect application for multi-family residences, retail shops and office spaces. An E26 adapter is included.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
65SEMW LED 30K 90CRI M6	191848772270	5"/6" LED Module with Smooth Trim	65W Incandescent	835	11.9W	3000K	90	120V	White	300

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

LBR6

6" LED Retrofit and Remodel Downlight

The 6-inch LBR offers a seamless install-from-below design and abundant energy savings while maintaining glare-free aesthetics. With a broad offering of aperture sizes, drivers, accessories and switchable CCTs and lumens, LBR is the perfect solution for any renovation project.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
LBR6 ALO2 SWW1 AR LSS MWD MVOLT UGZ QDS	194994825081	6" Retrofit, switchable CCT/ lumens, quick disconnects	1/42TRT or 2/26TRT	1,000-1,500-2,000	13-19-25W	3000-3500-4000-5000K	80	MVOLT (120-277V)	Clear	180

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

WF6C

JunoConnect™ Smart & Connected Wafer

JunoConnect makes smart lighting simple. Compatible with Amazon Alexa, Google Home, and Samsung SmartThings. Bluetooth and Zigbee enabled to support smart hub and mobile app connectivity. Smart and connected features include remote control of a single Wafer or zones, voice control and tunable white CCTs. Canless installation with no housing required. The JunoConnect Wafer functions and operates like a standard Juno Wafer out of the box. This allows the contractor to install, wire, and test the Wafers without Wi-Fi , or any commissioning of the lighting control system.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF6C RD TUWH MW M6	194994450641	6" JunoConnect Smart Wafer Downlight	75W Incandescent	1,000	13.5W	Tunable White (2700K- 5000K)	90	120V	White	576

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

WF6

6" LED 5CCT Switchable White

The 6-inch Wafer™ LED Ultra-Thin Downlight with Switchable White provides high-quality light output, efficiency, and features a switch for easy color temperature adjustment, while eliminating the need for recessed housings. Ability to change between 2700K, 3000K, 3500K, 4000K or 5000K color temperatures with the flip of a switch and cater to the needs of a space; 90+ CRI. The innovative, slim design allows for easy retrofit, remodel or new construction installation from below the ceiling.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF6 SWW5 90CRI MW M6	194994243731	6" Wafer-Thin LED Downlight with Switchable White	75W Incandescent	995-1,005	14W	2700K/3000K/3500K 4000K/5000K	90	120V	White	450
WF6 SWW5 90CRI MB M6	194994243809	6" Wafer-Thin LED Downlight with Switchable White	75W Incandescent	995-1,005	14W	2700K, 3000K, 3500K, 4000K, 5000K	90	120V	Matte Black	450

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

WF6

6" LED Regressed 5CCT Switchable White

The 6-inch Wafer™ LED Regressed Downlight with Switchable White provides high-quality light output, efficiency, and features a switch for easy color temperature adjustment, while eliminating the need for recessed housings. Ability to change between 2700K, 3000K, 3500K, 4000K or 5000K color temperatures with the flip of a switch and cater to the needs of a space; 90+ CRI. Regressed lens and baffle trim design to reduce glare for comfortable and even illumination.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF6 REG SWW5 90CRI MW M6	194994158660	6" Wafer Regressed LED Downlight with Switchable White	75W Incandescent	944-992	14W	2700K/3000K/3500K 4000K/5000K	90	120V	White	450

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

WF6E

6" Wafer-Thin LED Downlight

The 6-inch Wafer™ LED Downlights with non-conductive dead front trim design provide high-quality light output and efficiency while eliminating the need for recessed housings. Perfect for living and dining areas, bedrooms, closets, hallways, bathrooms, kitchens, basements, soffits, entryways and porches. The Wafer LED downlight is wet location listed, making it ideal for use in a breadth of outdoor residential, hospitality, commercial and multifamily applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF6E LED 30K 90CRI MW M6	194994316817	6" Wafer-Thin LED Downlight	65W Incandescent	790	11.2W	3000K	90	120V	White	450

Downlighting

Juno®

IC20 | IC20R

5" Incandescent Line-Voltage Housings

The IC-Rated incandescent downlights can be completely covered with insulation and feature an energy-efficient Air-Loc® seal to stop infiltration and exfiltration of air, reducing heating and cooling costs. The IC20 standard universal downlight is suitable for ceilings up to 1" thick and the IC20R remodel downlight can be installed from below the ceiling.

Ordering Information

Catalog Number	UPC	Description	Socket	Voltage	Pallet Quantity
IC20	661209000927	5" New Construction IC Housing	E26 Screw Shell	120V	120
IC20 W	661209107749	5" New Construction IC Housing with Push-In Electrical Connectors	E26 Screw Shell	120V	120
IC20R	661209952714	5" Remodel IC Housing	E26 Screw Shell	120V	180

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

205 WWH

V2015 WWH

Juno®

5" Trims

Compatible with IC20/IC20R Housings

Baffle trims are the perfect option to reduce glare and minimize ceiling brightness.

Ordering Information

Catalog Number	UPC	Description	Finish	Trim OD	Pallet Quantity
Juno Trims					
205 WWH	661209950307	5" Downlight Baffle Trim	White Baffle, White Trim Ring	6 1⁄4"	768
Juno VuLite® Trims					
V2015 WWH	661209080844	5" Fully Enclosed Downlight Baffle Trim	White Baffle, White Trim Ring	6 1⁄4"	576

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

DAD
MY HERO

Juno®

5RLD

5" LED Retrofit Trim Modules

The LED trim modules offer fast, retrofit installation in most medium base 5" housings using the included socket whip adapter and quick connect. They can also be installed directly into dedicated Juno 5" LED housings. The modules are dimmable down to 5% with a rated service life of 50,000 hours while providing many years of maintenance-free operation that delivers an exceptionally accurate color rendering of 90+ CRI.

Ordering Information

Catalog Number	UPC	Description	Finish	Dimming Protocol	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
5RLD G4 07LM 27K 90CRI 120 FRPC WWH M6	194994892892	5" Downlight Retrofit Trim	White	Forward & Reverse Phase Cut	65W Incandescent	700	8W	2700K	90	120V	300
5RLD G4 07LM 30K 90CRI 120 FRPC WWH M6	194994892939	5" Downlight Retrofit Trim	White	Forward & Reverse Phase Cut	65W Incandescent	700	8W	3000K	90	120V	300

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

IC1 LEDT24 | IC1R LEDT24

4" Housings for LED Retrofit Trims

The 4" LED housings, for use with Juno retrofit LED trim modules, offer an energy-efficient Air-Loc® sealed housing that stops exfiltration and infiltration of air while reducing heating and cooling costs without extra gaskets. The IC-rated housing can be completely covered with insulation. The IC1 LEDT24 is suitable for ceilings up to 1-1/4" thick. The IC1R LEDT24 remodel downlight, can be installed from below the ceiling.

IC1 LEDT24

IC1R LEDT24

Ordering Information

Catalog Number	UPC	Description	Socket	Voltage	Pallet Quantity
IC1 LEDT24	661209421494	4" New Construction IC Housing for LED Retrofit Trims	Quick Connector (No Socket)	120V	96
IC1R LEDT24	661209421500	4" Remodel IC Housing for LED Retrofit Trims	Quick Connector (No Socket)	120V	180

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

4RLD

4" LED Retrofit Trim Modules

The LED trim modules offer fast, retrofit installation in most medium base 4" housings using the included socket whip adapter and quick connect. They can also be installed directly into dedicated Juno 4" LED housings. The modules are dimmable down to 5% with a rated service life of 50,000 hours. They provide many years of maintenance-free operation while delivering an exceptionally accurate color rendering of 90+ CRI.

Ordering Information

Catalog Number	UPC	Description	Finish	Dimming Protocol	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
4RLD G4 06LM 27K 90CRI 120 FRPC WWH M6	194994892700	4" Downlight Retrofit Trim	White	Forward & Reverse Phase Cut	50W	600	8W	2700K	90	120V	546
4RLD G4 06LM 30K 90CRI 120 FRPC WWH M6	194994892472	4" Downlight Retrofit Trim	White	Forward & Reverse Phase Cut	50W	600	12W	3000K	90	120V	546
4RLD G4 09LM 27K 90CRI 120 FRPC WWH M6	194994892755	4" Downlight Retrofit Trim	White	Forward & Reverse Phase Cut	75W	900	12W	2700K	90	120V	546
4RLD G4 09LM 30K 90CRI 120 FRPC WWH M6	194994892854	4" Downlight Retrofit Trim	White	Forward & Reverse Phase Cut	75W	900	12W	3000K	90	120V	546

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

IC1 | TC1 | TC1R

4" Incandescent Line-Voltage Housings

Suitable for ceilings up to 1-3/4" thick, the IC-Rated incandescent downlight, IC1, can be completely covered with insulation and features an energy-efficient Air-Loc® seal to stop infiltration and exfiltration of air, reducing heating and cooling costs. Non-IC incandescent downlights, TC1/TC1R, require 3" spacing from insulation. The TC1R remodel downlight can be installed from below the ceiling.

Ordering Information

Catalog Number	UPC	Description	Socket	Voltage	Pallet Quantity
IC1	661209700001	4" New Construction IC Housing	E26 Screw Shell	120V	120
IC1 W	661209107756	4" New Construction IC Housing with Push-In Electrical Connectors	E26 Screw Shell	120V	144
TC1	661209700193	4" New Construction Non-IC Housing	E26 Screw Shell	120V	144
TC1R	661209017987	4" Remodel Non-IC Housing	E26 Screw Shell	120V	144

14 WWH

V4034 WWH

Juno®

4" Trims

Compatible with IC1/TC1/TC1R Housings

Baffle trims are the perfect option to reduce glare and minimize ceiling brightness.

Ordering Information

Catalog Number	UPC	Description	Finish	Trim OD	Pallet Quantity
Juno Trims					
14 WWH	661209950321	4" Downlight Baffle Trim	White Baffle, White Trim Ring	5"	1152
Juno VuLite® Trims					
V4034 WWH	661209210739	4" Fully Enclosed Downlight Baffle Trim	White Baffle, White Trim Ring	5"	2304

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

LDN4

4" LED Open and Wallwash New Construction Downlight

The Lithonia Lighting 4-inch LDN housings, for use with LDN4 trims, provide general illumination solutions for commercial-grade downlight applications. With 55° cutoff and deep source regression, LDN provides a glare-free, quiet ceiling without compromising on efficacy (85+LPW typical).

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
LDN4 35/10 MVOLT GZ10 HSG	193048378481	4" New Construction Non-IC LED Housing, 1000lm, 10% 0-10V dimming	26W CFL	1,000	11W	3500K	80	120-277V	84
LDN4 35/15 MVOLT GZ10 HSG	193048372816	4" New Construction Non-IC LED Housing, 1500lm, 10% 0-10V dimming	32W CFL	1,500	18W	3500K	80	120-277V	84
LDN4 35/20 MVOLT GZ10 HSG	193048377873	4" New Construction Non-IC LED Housing, 2000lm, 10% 0-10V dimming	42W CFL	2,000	22W	3500K	80	120-277V	84

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

LO4AR

LW4AR

Lithonia Lighting®

LDN4 Trims

Compatible with LDN4 Housings

The Lithonia Lighting 4-inch LDN trims, for use with LDN4 housings, provide general illumination solutions for commercial-grade downlight applications. LDN is available with 1.0 spacing criteria for downlight along with a complementary asymmetric wallwash distribution and 0-10V dimming down to 10%.

Ordering Information

Catalog Number	UPC	Description	Pallet Quantity
LO4AR LSS TRIM	745972691343	4" Open reflector with clear, semi-specular finish	180
LW4AR LSS TRIM	190887165678	4" Open wallwash with clear, semi-specular finish	180

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

L3 | L3R

4" Incandescent Line-Voltage Housings

The 4" recessed incandescent housings are rated IC/Non-IC for 2x8 and 2x6 new construction (L3) or remodel (L3R) applications. The L3 and L3R are suitable for ceilings up to 1-1/2" thick and are approved for all direct burial in insulation and all ceiling and wiring types.

Ordering Information

Catalog Number	UPC	Description	Lamp Source	Voltage	Socket	Pallet Quantity
L3 R6	745973345313	4" Airtight IC/Non-IC New Construction Housing	Incandescent	120V	E26 Screw Shell	144
L3R R6	745973345566	4" Airtight IC/Non-IC Remodel Housing	Incandescent	120V	E26 Screw Shell	312

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

301

3B1W R24

Lithonia Lighting®

4" Trims

Compatible with L3/L3R Housings

Baffle trims are the perfect option to reduce glare and minimize ceiling brightness. The eyeball trims are ideal for accenting objects. Open trims are designed to provide a uniform distribution of light.

Ordering Information

Catalog Number	UPC	Description	Flange Range	Finish	Lamp Included	Pallet Quantity
301 R12	745975234158	4" Open Trim	Wide	White	No	1344
3B1W R24	745975234264	4" Baffle Trim	Wide	White	No	1536

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

E Series

4" Switchable White LED Retrofit Module

The 4" recessed LED module is the most economical means to create a well lit environment with exceptional energy efficiency and near zero maintenance. The Switchable White feature provides high-quality light output, efficiency, and features a switch for easy color temperature adjustment, while eliminating the need for recessed housings. Ability to change between 2700K, 3000K, 3500K, 4000K or 5000K color temperatures with the flip of a switch and cater to the needs of a space; 90+ CRI. Great for retrofit into existing downlight cans or new construction and remodel applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
4BEMW SWW5 90CRI M6	194994160519	4" LED Baffle Trim Module with Switchable White	65W Incandescent	840	10.3W	2700K/3000K/3500K 4000K/5000K	90	120V	White	672
4SEMW SWW5 90CRI M6	194994160496	4" LED Smooth Trim Module with Switchable White	65W Incandescent	700	8.8W	2700K/3000K/3500K 4000K/5000K	90	120V	White	672

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

EXIT

Lithonia Lighting®

E Series

4" LED Module with Baffle Trim

The economical E Series LED downlight with baffle trim utilizes friction clip retention and fits most manufacturers' 4" recessed can-style housings. It can be dimmed down to 10% and maintains 70% light output after 35,000 hours of use. This downlight is perfect for applications such as multi-family residences, retail shops and office spaces. An E26 adapter is included.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
4BEMW LED 27K 90CRI M6	190887266719	4" LED Module with Baffle Trim	65W Incandescent	650	9.8W	2700K	90	120V	White	576
4BEMW LED 30K 90CRI M6	190887266702	4" LED Module with Baffle Trim	65W Incandescent	700	9.8W	3000K	90	120V	White	576
4BEMW LED 40K 90CRI M6	190887266733	4" LED Module with Baffle Trim	65W Incandescent	720	9.8W	4000K	90	120V	White	576

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

E Series

4" LED Module with Smooth Trim

The economical E Series LED downlight with smooth trim utilizes friction clip retention and fits most manufacturers' 4" recessed can-style housings. It can be dimmed down to 10% and maintains 70% light output after 35,000 hours of use. This downlight is perfect for applications such as multi-family residences, retail shops and office spaces. An E26 adapter is included.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
4SEMW LED 30K 90CRI M6	191848772614	4" LED Module with Smooth Trim	65W Incandescent	700	9.8W	3000K	90	120V	White	576

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

LBR4

4" LED Retrofit and Remodel Downlight

The 4-inch LBR offers a seamless install-from-below design and abundant energy savings while maintaining glare-free aesthetics. With a broad offering of aperture sizes, drivers, accessories and switchable CCTs and lumens, LBR is the perfect solution for any renovation project.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
LBR4 ALO2 SWW1 AR LSS MWD MVOLT UGZ QDS	194994822912	4" Retrofit, switchable CCT/ lumens, quick disconnects	1/42TRT or 2/26TRT	1,000-1,500-2,000	13-19-25W	3000-3500-4000-5000K	80	MVOLT (120-277V)	Clear	180

Juno®

WF4C

JunoConnect™ Smart & Connected Wafer

JunoConnect makes smart lighting simple. Compatible with Amazon Alexa, Google Home, and Samsung SmartThings. Bluetooth and Zigbee enabled to support smart hub and mobile app connectivity. Smart and connected features include remote control of a single Wafer or zones, voice control and tunable white CCTs. Canless installation with no housing required. The JunoConnect Wafer functions and operates like a standard Juno Wafer out of the box. This allows the contractor to install, wire, and test the Wafers without Wi-Fi , or any commissioning of the lighting control system.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF4C RD TUWH MW M6	194994450634	4" JunoConnect Smart Wafer Downlight	65W Incandescent	850	10.6W	Tunable White (2700K- 5000K)	90	120V	White	540

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

WF4

4" LED Switchable White

The 4-inch Wafer™ LED Ultra-Thin Downlight with Switchable White provides high-quality light output, efficiency, and features a switch for easy color temperature adjustment, while eliminating the need for recessed housings. Ability to change between 2700K, 3000K, 3500K, 4000K or 5000K color temperatures with the flip of a switch and cater to the needs of a space; 90+ CRI. The innovative, slim design allows for easy retrofit, remodel or new construction installation from below the ceiling.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF4 SWW5 90CRI MW M6	194994243465	4" Wafer-Thin LED Downlight with Switchable White	65W Incandescent	665-690	10.5W	2700K/3000K/3500K 4000K/5000K	90	120V	White	576
WF4 SWW5 90CRI MB M6	194994243595	4" Wafer-Thin LED Downlight with Switchable White	65W Incandescent	665-690	10.5W	2700K/3000K/3500K 4000K/5000K	90	120V	Matte Black	576

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

WF4

4" LED Regressed Switchable White

The 4-inch Wafer™ LED Regressed Downlight with Switchable White provides high-quality light output, efficiency, and features a switch for easy color temperature adjustment, while eliminating the need for recessed housings. Ability to change between 2700K, 3000K, 3500K, 4000K or 5000K color temperatures with the flip of a switch and cater to the needs of a space; 90+ CRI. Regressed lens and baffle trim design to reduce glare for comfortable and even illumination.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF4 REG SWW5 90CRI MW M6	194994158523	4" Wafer Regressed LED Downlight with Switchable White	65W Incandescent	640-680	10.5W	2700K/3000K/3500K 4000K/5000K	90	120V	White	576

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

WF4E

4" Wafer-Thin LED Downlight

The 4-inch Wafer™ LED Downlights with non-conductive dead front trim design provide high-quality light output and efficiency while eliminating the need for recessed housings. Perfect for living and dining areas, bedrooms, closets, hallways, bathrooms, kitchens, basements, soffits, entryways and porches. The Wafer LED downlight is wet location listed, making it ideal for use in a breadth of outdoor residential, hospitality, commercial and multifamily applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
WF4E LED 30K 90CRI MW M6	194994316787	4" Wafer-Thin LED Downlight	65W Incandescent	580	8.14W	3000K	90	120V	White	576

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

The flush mounts, linears and undercabinets you need to get residential jobs done right.

Residential

Juno®

SlimBasics™ JSBT

Tapered LED Disk Light

The JSBT Tapered Disk Light features a sloped trim that blends seamlessly into the ceiling plane. Available in 6" and 4" the JSBT installs directly into any standard junction box. The all in one design includes LED light engine, lens, and trim. Ideal for multi-family and single-family applications. Wet location listed.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
JSBT 4IN 30K 90CRI WL MW M6	194995365364	4" SlimBasics™ Tapered LED Disk Light	65W Incandescent	750	10.4W	3000K	90	120V	White	600
JSBT 6IN 30K 90CRI WL MW M6	194995365388	6" SlimBasics™ Tapered LED Disk Light	75W Incandescent	990	14.8W	3000K	90	120V	White	900

Juno®

SlimBasics™ JSBC

Straight LED Disk Light

The modern design of the SlimBasics™ JSBC Straight LED Disk Light features a low-profile metal housing in 5" and 7" that mounts directly to any standard junction box. Its all-in-one design includes an LED light engine, lens and trim. Ideal for use in corridors, foyers, living spaces, closets, hallways, pantries, stairways and much more.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
JSBC 5IN 30K 90CRI WH M6	193048340167	5" SlimBasics™ JSBC Straight LED Disk Light	65W Incandescent	650	11W	3000K	90	120V	White	450
JSBC 7IN 30K 90CRI WH M6	193048340389	7" SlimBasics™ JSBC Straight LED Disk Light	75W Incandescent	1050	12W	3000K	90	120V	White	450

Lithonia Lighting®

FMLRL

LED Flush Mount

With a linear, low-profile design, the FMLRL LED flush mounts provide general illumination for residential and light commercial applications such as kitchens, offices, utility work areas and stairways. Long-lasting LEDs turn on instantly and can be dimmed down to 10% of output using a standard triac dimmer.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
FMLRL 11 14840 M4	753573687405	11" Round LED Flush Mount	75W Incandescent	1,100	16W	4000K	80	120V	120
FMLRL 14 20840 M4	753573687412	14" Round LED Flush Mount	2 - 60W Incandescent	1,600	24W	4000K	80	120V	72

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Juno®

6RLS

6" LED Surface Mount

The easy-to-install 6RLS surface mount attaches directly to any standard junction box in two simple steps. Its all-in-one design includes an LED light engine, lens and trim. No recessed housing is required. This super-thin fixture fits flush with any flat surface, mimicking the appearance of a recessed downlight and is suitable for ceiling or wall mount.

Ordering Information

Catalog Number	UPC	Description	Finish	Dimming Protocol	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
6RLS G2 07LM 30K 90CRI 120 FRPC WH M6	190887659061	6" Basic Series™ LED Surface Mount Fixture	White	Forward & Reverse Phase Cut	65W Incandescent	700	10W	3000K	90	120V	540
6RLS G2 10LM 30K 90CRI 120 FRPC WH M6	190887659078	6" Basic Series LED Surface Mount Fixture	White	Forward & Reverse Phase Cut	75W Incandescent	1,000	14.5W	3000K	90	120V	540

The Contractor Select program offers our most popular product CCTs. Additional CCTs are available. Please see acuitybrands.com for more information.

Juno®

4RLS

4" LED Surface Mount

The easy-to-install 4RLS surface mount attaches directly to any standard junction box in two simple steps. Its all-in-one design includes an LED light engine, lens and trim. No recessed housing is required. This super-thin fixture fits flush with any flat surface, mimicking the appearance of a recessed downlight and is suitable for ceiling or wall mount.

Ordering Information

Catalog Number	UPC	Description	Finish	Dimming Protocol	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
4RLS G2 07LM 30K 90CRI 120 FRPC WH M6	190887658989	4" Basic Series™ LED Surface Mount Fixture	White	Forward & Reverse Phase Cut	65W Incandescent	700	10W	3000K	90	120V	576

The Contractor Select program offers our most popular product CCTs. Additional CCTs are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

FMML 7

LED Flush Mount

Small, but mighty, the 7" LED Versi Lite™ flush mount is ideal for indoor and outdoor (wet location configuration only) residential and light commercial applications, including closets, hallways, utility work areas, pantries and more.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
FMML 7 830 M6	820476182860	7" Versi Lite	60W Incandescent	642	10W	3000K	80	120V	White	540

Juno®

UCES

LED Undercabinet Switchable White

Available in various lengths, the UCES LED Undercabinet with Switchable White provides an ecnomical, high-quality light output and features a switch for easy color temperature adjustment. The soft, widespread illumination lens provides great task or accent lighting for cabinets, coves, closets, display cases and office lighting in new construction or retrofit applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Finish	Pallet Quantity
UCES 12IN SWW4 90CRI WH M6	193047858922	12" Economy LED Undercabinet	1-8W T5 Fluorescent	415-430	6.7W	3000K, 3500K, 4000K	90	White	1296
UCES 18IN SWW4 90CRI WH M6	193047858953	18" Economy LED Undercabinet	1-13W T5 Fluorescent	525-544	8.2W	3000K, 3500K, 4000K	90	White	864
UCES 24IN SWW4 90CRI WH M6	193047858960	24" Economy LED Undercabinet	2-8W T5 Fluorescent	709-737	10.6W	3000K, 3500K, 4000K	90	White	648
UCES 36IN SWW4 90CRI WH M6	193047858977	36" Economy LED Undercabinet	2-13W T5 Fluorescent	1,090-1,142	16.7W	3000K, 3500K, 4000K	90	White	432

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

FMVC

LED Vanity

Lithonia Lighting LED Vanities are ideal for applications in residential, commercial, hospitality, school, and multifamily settings. Available styles include the Contemporary Square, the Contemporary Cylinder, and the Traditional Square. Lithonia Lighting LED Vanities provide reliable, high quality illumination with 50,000-hour maintenance-free LEDs.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
FMVCCL 24IN MVOLT 30K 90CRI BN M6	889804268980	2' Contemporary Cylinder Vanity LED	2- 17W T8 Fluorescent	1,300	18W	3000K	90	120-277V	Brushed Nickel	72
FMVTSL 24IN MVOLT 30K 90CRI BN M4	889804269628	2' Traditional Square Vanity LED	2- 17W T8 Fluorescent	1,300	18W	3000K	90	120-277V	Brushed Nickel	72
FMVCSL 24IN MVOLT 30K 90CRI BN M6	889804269253	2' Contemporary Square Vanity LED	2- 17W T8 Fluorescent	1,300	18W	3000K	90	120-277V	Brushed Nickel	108

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

FMLWL

LED Wraparound

The low-profile, linear and narrow FMLWL LED wraparound with decorative end-caps and a white, acrylic diffuser provides widespread, uniform illumination. This LED wraparound is ideal for many applications, including kitchens, offices, utility work areas and stairways.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Energy Star	DLC	Pallet Quantity
FMLWL 48 840 ZT MVOLT	191848384558	4' LED Wrap, Ceiling and Wall with 0-10V dimming	2 Lamp 32W T8 Fluorescent	4,600	42W	4000K	85	120-277V	No	Yes	112
FMLWL 48 840	888791197969	4' LED Wrap, Ceiling and Wall	32W T8 Fluorescent	2,900	41W	4000K	85	120V	Yes	No	112
FMLWL 24 840	888791197921	2' LED Wrap, Ceiling and Wall	17W T8 Fluorescent	1,200	20W	4000K	85	120V	Yes	No	224

Lithonia Lighting®

FML4W

LED Wide Wraparound

The low-profile, wide housing FML4W LED wraparound provides cost-effective ambient lighting in surface-mount ceiling and wall applications. With hassle-free installation and an aesthetically pleasing polycarbonate diffusing lens which provides even illumination, the versatile FML4W is perfect for a variety of residential, commercial and institutional new construction or renovation applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Finish	Pallet Quantity
FML4W 48 5000LM 840 TD	194994011507	4' LED Wrap	2 or 3-Lamp Fluorescent T8 or T12	5,000	54W	4000K	>80	120V	White	44
FML4W 48 5000LM 840 ZT MVOLT	194994026815	4' LED Wrap	2 or 3-Lamp Fluorescent T8 or T12	5,000	53.4W	4000K	>80	120-277V	White	44
FML4W 48 AL06 SEF 840 MVOLT	194994027249	4' LED Wrap	2, 3 or 4-Lamp Fluorescent T8 or T12	4,000, 5,000, 6,000	50W	4000K	>80	120-277V	White	44

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

LBL4

LED Wraparound Series

The LBL LED wraparound is a high-quality solution for general purpose lighting in surface mount applications. The 4 ft. LBL is designed to replace traditional 2-lamp fluorescent wraps while offering all the great benefits of LED. The LBL4 is an ideal choice for educational spaces, offices, storage rooms, hallways or closets.

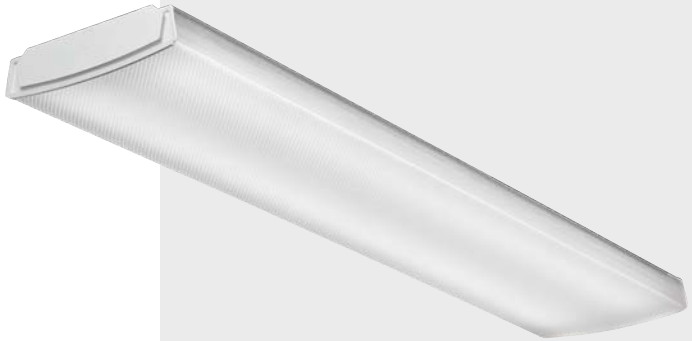

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
LBL4 LP835	190887819199	4' LED Wraparound, Curved Profile	2 Lamp 32W T8	4,200	32W	3500K	82	120-277V	56
LBL4 LP840	190887819359	4' LED Wraparound, Curved Profile	2 Lamp 32W T8	4,200	32W	4000K	82	120-277V	56

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

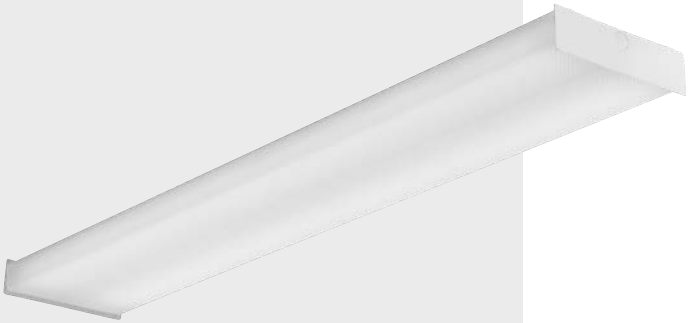

Lithonia Lighting®

SBL

LED Square Wraparound

SBL is a square-basket LED wraparound designed to deliver ambient lighting for surface-mount ceiling applications. The 4 ft. SBL replaces 2-lamp fluorescent wraps and is ideal for schools, offices, hospitals and many other applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	CRI	Voltage	Pallet Quantity
SBL4 LP835	190887819410	4' LED Wraparound, Square Profile	2 Lamp 32W T8	3,900	32W	3500K	80	120-277V	75
SBL4 LP840	190887819434	4' LED Wraparound, Square Profile	2 Lamp 32W T8	3,900	32W	4000K	80	120-277V	75

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Backed by brands trusted
by professionals for over
70 years.

Industrial

Lithonia Lighting®

JEBL

LED Round High Bay

The JEBL is built to last with 6kV surge protection standard, 55°C ambient temperature rating and IP65 rated for elimination of dust, moisture and airborne contaminants. The unique, quick-connect, driver-to-optical assembly interface allows for quick and easy maintenance for applications including warehousing, gymnasiums, manufacturing and outdoor canopies.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Distribution	Pallet Quantity
JEBL 12L 40K 80CRI WH	191848153840	LED Round High Bay	4 Lamp T5HO, 6 Lamp T8	12,000	92.4W	4000K	120-277V	General	54
JEBL 12L 50K 80CRI WH	191848153901	LED Round High Bay	4 Lamp T5HO, 6 Lamp T8	12,000	92.4W	5000K	120-277V	General	54
JEBL 18L 40K 80CRI WH	191848153895	LED Round High Bay	6 Lamp T5HO, 8 Lamp T8, 400W HID	18,000	136W	4000K	120-277V	General	54
JEBL 18L 50K 80CRI WH	191848153888	LED Round High Bay	6 Lamp T5HO, 8 Lamp T8, 400W HID	18,000	136W	5000K	120-277V	General	54
JEBL 24L 40K 80CRI WH	191848153918	LED Round High Bay	8 Lamp T5HO, 400W HID	24,000	181.6W	4000K	120-277V	General	42
JEBL 24L 50K 80CRI WH	191848153956	LED Round High Bay	8 Lamp T5HO, 400W HID	24,000	181.6W	5000K	120-277V	General	42
JEBL 30L 40K 80CRI WH	191848153925	LED Round High Bay	10 Lamp T5HO, 575W HID	30,000	218W	4000K	120-277V	General	42
JEBL 30L 50K 80CRI WH	191848153932	LED Round High Bay	10 Lamp T5HO, 575W HID	30,000	218W	5000K	120-277V	General	42

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

CPHB

Compact Pro™ LED High Bay

The Contractor Select Compact Pro High Bay by Lithonia Lighting® is the budget-oriented high bay designed for contractors from the ground up. It's the most compact high bay on the market, making it easier and quicker to install. Built with quality to last and performance to get the job done.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Distribution	Pallet Quantity
CPHB 12LM MVOLT 40K	194994608325	14" LED High Bay	175W MH, 4-lamp T8 HBF, 2 Lamp T5HO	12,000	88	4000K	120-277V	Medium	144
CPHB 12LM MVOLT 50K	194994429548	14" LED High Bay	175W MH, 4-lamp T8 HBF, 2 Lamp T5HO	12,000	88	5000K	120-277V	Medium	144
CPHB 15LM MVOLT 40K	194994429562	14" LED High Bay	200W MH, 6 Lamp T8 NBF	15,000	104	4000K	120-277V	Medium	144
CPHB 15LM MVOLT 50K	194994429593	14" LED High Bay	200W MH, 6 Lamp T8 NBF	15,000	104	5000K	120-277V	Medium	144
CPHB 18LM MVOLT 40K	194994608295	14" LED High Bay	250W MH, 6 Lamp T8 HBF, 4 Lamp T5HO	18,000	134	4000K	120-277V	Medium	144
CPHB 18LM MVOLT 50K	194994429630	14" LED High Bay	250W MH, 6 Lamp T8 HBF, 4 Lamp T5HO	18,000	134	5000K	120-277V	Medium	144
CPHB 24LM MVOLT 40K	194994429685	22" LED High Bay	400W MH, 6 Lamp T5HO	24,000	174	4000K	120-277V	Medium	96
CPHB 24LM MVOLT 50K	194994429753	22" LED High Bay	400W MH, 6 Lamp T5HO	24,000	174	5000K	120-277V	Medium	96
CPHB 30LM MVOLT 40K	194994429746	22" LED High Bay	575W MH, 10 Lamp T8 HBF	30,000	214	4000K	120-277V	Medium	96
CPHB 30LM MVOLT 50K	194994429784	22" LED High Bay	575W MH, 10 Lamp T8 HBF	30,000	214	5000K	120-277V	Medium	96

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

I-BEAM® IBE

LED Linear High Bay

The I-BEAM® IBE LED luminaire gives budget-conscious customers a reliable LED solution featuring 6kV surge protection standard. The I-BEAM® IBE LED is designed to meet the challenges of warehouse and light industrial applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Distribution	Pallet Quantity
IBE 12LM MVOLT 40K	191848491010	LED Linear High Bay	4 Lamp T8, 250W HID	12,000	85.2W	4000K	120-277V	General	54
IBE 12LM MVOLT 50K	191848491096	LED Linear High Bay	4 Lamp T8, 250W HID	12,000	85.2W	5000K	120-277V	General	54
IBE 15LM MVOLT 40K	191848194133	LED Linear High Bay	4 Lamp T5HO, 6 Lamp T8	15,000	103.9W	4000K	120-277V	General	54
IBE 15LM MVOLT 50K	191848491058	LED Linear High Bay	4 Lamp T5HO, 6 Lamp T8	15,000	103.9W	5000K	120-277V	General	54
IBE 18LM MVOLT 40K	191848491027	LED Linear High Bay	4 Lamp T5HO, 6 Lamp T8, 400W HID	18,000	136.1W	4000K	120-277V	General	54
IBE 18LM MVOLT 50K	191848491072	LED Linear High Bay	4 Lamp T5HO, 6 Lamp T8, 400W HID	18,000	136.1W	5000K	120-277V	General	54
IBE 22LM MVOLT 40K	191848491195	LED Linear High Bay	6 Lamp T5HO, 8 Lamp T8	22,000	164.7W	4000K	120-277V	General	54
IBE 22LM MVOLT 50K	191848491133	LED Linear High Bay	6 Lamp T5HO, 8 Lamp T8	22,000	164.7W	5000K	120-277V	General	54

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

CSVT

Vapor Tight LED Strip Light

The CSVT™ by Lithonia Lighting® is built on the technological framework of the CSS, providing greater customization and performance for everyday spaces. And with the ability to switch lumens and adjust color temperature in one fixture, the CSVT can easily be adapted to the needs of each project – 9 different variations within the same SKU!

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Distribution	Pallet Quantity
CSVT L48 5000LM MVOLT 40K 80CRI	194995069408	4' MVOLT Vapor Tight LED Strip Light	3-32T8, 2- 2-54T5HO	4,946	42W	4000K	120-277V	Medium	70
CSVT L48 ALO3 MVOLT SWW3 80CR	194995069507	4' MVOLT Switchable LED Vapor Tight Strip Light	3-32T8, 2- 2-54T5HO	3,106-4,946	27-42W	3500K/4000K/5000K	120-277V	Medium	70
CSVT L96 10000LM MVOLT 40K 80CRI	194995280858	8' MVOLT Vapor Tight LED Strip Light	2 Lamp T12, 2-96 T8	10,300	87.9W	4000K	120-277V	Medium	70
CSVT L96 ALO4 MVOLT SWW3 80CRI	194995069446	8' MVOLT Switchable LED Vapor Tight Strip Light	2 Lamp T12, 2-96 T8	6,495-10,300	55.3-87.9W	3500K/4000K/5000K	120-277V	Medium	70

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Contractor Select™ makes
product selection simple.

Exit & Emergency

Lithonia Lighting®

LQM

Quantum® LED Exit Sign

The LQM is an attractive and slim exit sign from the Quantum family of emergency lighting products. Ideal for applications requiring an attractive exit sign with quick installation and low energy consumption. It has a fully assembled single face exit sign with an extra faceplate for easy field conversion to double face standard. These are available in red or green letters with a universal mount and canopy included.

Ordering Information

Catalog Number	UPC	Description	Lamp Source	Input Watts 120V	Input Watts 277V	Input Amps 120V	Input Amps 277V	Voltage	Battery Included	Pallet Quantity
LQM S W 3 R 120/277 M6	784231011508	LED Exit, Red, AC Only	LED	0.62W	0.69W	0.05	0.06	120/277V	No	270
LQM S W 3 G 120/277 M6	784231011584	LED Exit, Green, AC Only	LED	0.62W	0.74W	0.05	0.06	120/277V	No	270
LQM S W 3 R 120/277 EL N M6	784231011553	LED Exit, Red, Battery Back-Up	LED	0.71W	0.92W	0.05	0.06	120/277V	Yes	270
LQM S W 3 G 120/277 EL N M6	784231011614	LED Exit, Green, Battery Back-Up	LED	0.66W	0.70W	0.05	0.06	120/277V	Yes	270

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

LHQM

Quantum® LED Emergency Combos

The Quantum LHQM LED delivers 25' center-to-center spacing to meet the NFPA 101 Life Safety Code with fewer fixtures. The combination of exit and emergency lighting also has a self-diagnostic option available.

Ordering Information

Catalog Number	UPC	Description	Lamp Source	Input Watts 120V	Input Watts 277V	Voltage	Pallet Quantity
LHQM LED R M6	745976254438	LED Exit/Unit Combo Red, White	LED	4.3W	4.3W	120/277V	144
LHQM LED G M6	745976253950	LED Exit/Unit Combo Green, White	LED	4.3W	4.3W	120/277V	144
LHQM LED R HO M6	745976254322	LED Exit/Unit Combo Red Remote Capacity Option, White	LED	4.3W	4.3W	120/277V	144

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

EXRG

Emergency Exit

The Lithonia Lighting Basics™ EXRG Exit Sign is a fully assembled single-face exit with extra faceplate is available in red and green letters. It's low profile makes it ideal for safely illuminated the path of egress in small spaces and can be wall or ceiling mounted. The emergency power provides 90 minutes of illumination in the event of a power loss. The EXRG has an internal switch that ships standard as a red exit and can be switched in the field to green.

Ordering Information

Catalog Number	UPC	Description	Lamp Source	Input Watts	Voltage	Battery Included	Pallet Quantity
EXRG M6	194994900658	Red/Green Exit, AC Only	LED	1W	120/277V	No	270
EXRG EL M6	194994900696	Red/Green Exit with Ni-MH Backup Battery	LED	1W	120/277V	Yes	270

Lithonia Lighting®

ECRG

LED Emergency Combos

The Lithonia Lighting® ECRG combination of exit and emergency lighting are available with red or green letters and are ideal for mounting above-the-door and other tight fits at lower mounting heights. These LED emergency combos will provide 90 minutes of emergency power in the event of a power loss. The ECRG has an internal switch that ships standard as a red emergency light exit combo and can be switched in the field to green.

Ordering Information

Catalog Number	UPC	Description	Supply Voltage	Input Watts 120V	Input Watts 277V	Input Amps 120V	Input Amps 277V	Pallet Quantity
ECRG RD M6	194994900412	Red/Green LED Exit/Unit Combo, Round Lamp Heads	120-277V	2W	2W	0.03	0.02	216
ECRG HO RD M6	194994900429	Red/Green LED Exit/Unit Combo with remote capacity, Round Lamp Heads	120-277V	2.8W	2.8W	0.05	0.03	216
ECRG SQ M6	194994900467	Red/Green LED Exit/Unit Combo, Square Lamp Heads	120/277V	3.5W	3.5W	0.03	0.02	72
ECRG HO SQ M6	194994900504	Red/Green LED Exit/Unit Combo with remote capacity, Square Lamp Heads	120/277V	4W	4W	0.03	0.02	72

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

EU2L | EU2C

LED Emergency Lighting Units

The Lithonia Lighting® EU2L and EU2C dual head emergency lighting units offer the option of either round or square lamp heads. They safely illuminate the path of egress in small spaces at lower mounting heights and will provide 90 minutes of emergency power in the event of a power loss.

EU2C

EU2L

Ordering Information

Catalog Number	UPC	Description	Lamp Source	Input Watts 120V	Input Watts 277V	Input Amps 120V	Input Amps 277V	Voltage	Pallet Quantity
EU2L M12	191848035351	Emergency Lighting Unit, LED, White, Round Heads	LED	0.33W	0.37W	0.05	0.05	120/277V	756
EU2C M6	191848037188	Emergency Lighting Unit, LED, White, Square Heads	LED	0.56W	0.70W	0.072	0.072	120/277V	288
EU2L REM M12	191848035375	Emergency Lighting Unit, LED, White, Round Heads, Remote Capable	LED	0.52W	0.60W	0.07	0.07	120/277V	432

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

ELM2L

ELM4L

Lithonia Lighting®

ELM2L | ELM4L

Quantum® LED Emergency Lighting Units

The ELM2L and ELM4L from Lithonia Lighting are aesthetically pleasing emergency LED light fixtures. They provide a minimum of 90 minutes of illumination when there is a loss of power. Both fixtures include a unique track and swivel arrangement which permits full range of direction for lamp head aiming for wall and ceiling mount applications (mounting heights range from 7.5' to 24'), making installation easy while maintaining the maximum path of egress coverage. The linear pattern provides wide uniform distributions that deliver broad spacing up to 67' and low max to min ratios that far exceed code requirements.

Ordering Information

Catalog Number	UPC	Description	Lamp Source	Input Watts 120V	Input Watts 277V	Input Amps 120V	Input Amps 277V	Voltage	Pallet Quantity
ELM2L M12	191848091920	Commercial Emergency Lighting Unit, LED, White, Nicad Battery	LED	1.09W	1.09W	0.018	0.018	120/277V	432
ELM2L UVOLT LTP M12	191848078112	Commercial Emergency Lighting Unit, LED, White, Lithium Iron Phosphate Battery	LED	1.35W	1.35W	0.022	0.022	120/347V	432
ELM4L	191723916287	Commercial Emergency Lighting Unit, LED, White, Nicad Battery	LED	3.15W	3.15W	0.032	0.032	120/277V	432

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

IOTA®

LEM04 A

4W Emergency LED Driver

The Lithonia Lighting® LEM04 A is a standard emergency driver that delivers an initial 4 watts of emergency power to indoor commercial fixtures using 20-50VDC Class 2 LEDs. The LEM04 A includes dual flexible conduit for external connection to the fixture compartment and test accessories. The initial 4W output provides emergency illumination at 90 minutes for standard ceiling height fixtures.

Ordering Information

Catalog Number	UPC	Description	Battery Type	Input Voltage	Output Voltage	Battery Type	Pallet Quantity
LEM04 A M6	194994620730	Emergency LED Driver	Ni-Cad	120-277VAC, 50/60Hz	20-50VDC (auto-sense)	Ni-Cad	276

IOTA®

LEM08 A

8W Emergency LED Driver

The Lithonia Lighting® LEM08 A is a standard emergency driver that delivers an initial 8 watts of emergency power to indoor commercial fixtures using 20-50VDC Class 2 LEDs. The LEM08 A includes dual flexible conduit for external connection to the fixture compartment and test accessories. The initial 8W output provides increased emergency illumination at 90 minutes for standard ceiling height fixtures.

Ordering Information

Catalog Number	UPC	Description	Battery Type	Input Voltage	Output Voltage	Battery Type	Pallet Quantity
LEM08 A M6	194994620846	Emergency LED Driver	Ni-Cad	120-277VAC, 50/60Hz	20-50VDC (auto-sense)	Ni-Cad	276

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

IOTA®

ILB CP05

Constant Power Emergency LED Drivers

ILB CP05 Emergency Drivers provide confident emergency lighting capability to Class 2 LED luminaires. The constant power design operates LEDs at 5 watts, resulting in predictable, non-diminishing emergency illumination for the full emergency runtime (500 lumens for a 100 lumen per watt fixture.) Auto-sense 10-60VDC Output Voltage ensures compatibility with most any Class 2 fixture design.

UL LISTED

Ordering Information

Catalog Number	UPC	Description	Supply Voltage	Output Watts	Lumen Output	Pallet Quantity
ILB CP05 A M5	040232420276	Constant Power Emergency LED Driver	120-277VAC, 50/60Hz	5W	500	150
ILB CP05 HE A M5	040232601644	High-Efficiency Constant Power Emergency LED Driver	120-277VAC, 50/60Hz	5W	500	150

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

IOTA®

ILB CP10

Constant Power Emergency LED Drivers

ILB CP10 Emergency Drivers provide confident emergency lighting capability to Class 2 LED luminaires. The constant power design operates LEDs at 10 watts, resulting in predictable, non-diminishing emergency illumination for the full emergency runtime (1000 lumens for a 100 lumen per watt fixture.) Auto-sense 10-60VDC Output Voltage ensures compatibility with most any Class 2 fixture design.

Ordering Information

Catalog Number	UPC	Description	Supply Voltage	Output Watts	Lumen Output	Pallet Quantity
ILB CP10 A M5	040232420382	Constant Power Emergency LED Driver	120-277VAC, 50/60Hz	10W	1,000	150
ILB CP10 HE A M5	040232526442	High-Efficiency Constant Power Emergency LED Driver	120-277VAC, 50/60Hz	10W	1,000	150

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

LISTED

Lithonia Lighting®

EI500

Emergency Battery Pack

The Lithonia Lighting® low-profile EI500 Fluorescent Battery Pack by Power Sentry® provides 90 minutes of emergency power for many T8 and T12 fluorescent lamp types in the case of power loss.

Ordering Information

Catalog Number	UPC	Description	Supply Voltage	Output Watts	Lumen Output	Pallet Quantity
EI500 M12	745973432075	Fluorescent Battery Pack	120/277V	2.3W	500	576

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Get down to business with
Contractor Select™.

Outdoor

Lithonia Lighting®

WPX LED

Wall Pack Luminaires

The WPX LED wall pack family is the choice for your everyday wall mounted lighting needs. With lumen packages of 1,550 to 6,000 lumens, the WPX family replaces up to 400W metal halide wall packs. The WPX footprints are larger than that of typical metal halide glass wall packs so they fully cover unsightly stains, resulting in a neat application without the need for additional patch and repair. The WPX has the options to meet the needs of any application.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
WPX1 LED P2 40K MVOLT DDBXD M4	193048870589	LED Wall Pack, Site-Wide Solution	175W HID	2,900	24W	4000K	120-277V	Dark Bronze	No	Yes	160
WPX1 LED P2 50K MVOLT DDBXD M4	193048870572	LED Wall Pack, Site-Wide Solution	175W HID	2,900	24W	5000K	120-277V	Dark Bronze	No	Yes	160
WPX2 LED 40K MVOLT DDBXD M2	193048870756	LED Wall Pack, Site-Wide Solution	250W HID	6,000	47W	4000K	120-277V	Dark Bronze	No	Yes	120
WPX2 LED 50K MVOLT DDBXD M2	193048870770	LED Wall Pack, Site-Wide Solution	250W HID	6,000	47W	5000K	120-277V	Dark Bronze	No	Yes	120

TWX1

TWX2

TWX3

Lithonia Lighting®

TWX LED

Wall Pack Luminaires

The TWX LED wall pack, with its sleek design, features premium borosilicate glass lens that is designed specifically for this product, working in conjunction with the high-efficiency light engine to provide superior illumination while minimizing wasted up-light. The new slim design allows more product to be placed on the distributor shelf and creates a less obtrusive appearance on the building. TWX LED is available in three sizes creating a complete and compelling offering.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens (Adjustable)	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
TWX1 LED ALO 40K MVOLT DDBTXD	194994620464	LED Wall Pack, Glass Lens	CFL – 100W HID	600-2,950	4W- 22W	4000K	120-277V	Dark Bronze	No	Yes	98
TWX1 LED ALO 50K MVOLT DDBTXD	194994620457	LED Wall Pack, Glass Lens	CFL – 100W HID	600-2,950	4W- 22W	5000K	120-277V	Dark Bronze	No	Yes	98
TWX1 LED P2 40K MVOLT PE DDBTXD	194995034444	LED Wall Pack, Glass Lens	CFL – 100W HID	600-2,950	4W- 22W	4000K	120-277V	Dark Bronze	Yes	Yes	98
TWX2 LED ALO 40K MVOLT DDBTXD	194994620488	LED Wall Pack, Glass Lens	70W-250W HID	1,450-6,850	9W- 54W	4000K	120-277V	Dark Bronze	No	Yes	77
TWX2 LED ALO 50K MVOLT DDBTXD	194994620495	LED Wall Pack, Glass Lens	70W-250W HID	1,450-6,850	9W- 54W	5000K	120-277V	Dark Bronze	No	Yes	77
TWX3 LED ALO 40K MVOLT DDBTXD	194994620594	LED Wall Pack, Glass Lens	100W-400W HID	2,900-13,850	18W-107W	4000K	120-277V	Dark Bronze	No	Yes	42
TWX3 LED ALO 50K MVOLT DDBTXD	194994620549	LED Wall Pack, Glass Lens	100W-400W HID	2,900-13,850	18W-107W	5000K	120-277V	Dark Bronze	No	Yes	42
TWPX3 LED ALO 50K MVOLT DDBTXD	194994620556	LED Wall Pack, Polycarbonate Lens	100W-400W HID	2,750-13,200	18W-108W	5000K	120-277V	Dark Bronze	No	Yes	42

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

OVWP

LED Wall Sconce

The OVWP LED wall sconce is an attractive and energy-efficient LED wall sconce. The added benefits of dusk-to-dawn controls makes it ideal for warehouses, residential single and multi-family applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	Pallet Quantity
OVWP LED 40K 120 PE DDB M4	889804851090	LED Wall Sconce	70W HID	1,200	14W	4000K	120V	Bronze	Yes	512

Lithonia Lighting®

QTE

LED Floodlight

The QTE LED floodlight is ideal to replace up to 500W Halogen lamps and comes with knuckle or yoke mount options. This floodlight is an extremely cost-effective solution, great for illuminating yards, driveways, signage, patios, warehouses and security applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
QTE LED P1 40K 120 THK DDB M2	191848090788	LED Floodlight, Threaded Knuckle	150W Halogen	2,500	24W	4000K	120V	Dark Bronze	No	Yes	163
QTE LED P2 40K 120 THK DDB M2	191848093436	LED Floodlight, Threaded Knuckle	300W Halogen	4,000	40W	4000K	120V	Dark Bronze	No	Yes	162
QTE LED P3 40K 120 THK DDB M6	191848092590	LED Floodlight, Threaded Knuckle	500W Halogen	6,750	66W	4000K	120V	Dark Bronze	No	Yes	108
QTE LED P3 40K 120 YK DDB M6	191848092606	LED Floodlight, Yoke	500W Halogen	6,750	66W	4000K	120V	Dark Bronze	No	Yes	108

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

TFX1 | TFX2

LED Floodlight

The TFX LED floodlight family is an industry-leading distributor stock solution, providing cost-effective and energy-efficient solutions to replace HID floodlights. In addition, payback can be achieved in less than two years, due to DLC Premium listing and 140 lumens per watt efficacy. Comes in four sizes, delivering up to 41,000 lumens, making TFX the ideal solution to replace 70W to 400W HID luminaires.

TFX1

TFX2

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC Premium	Pallet Quantity
TFX1 LED 40K MVOLT THK DDBXD M6	193047670173	LED Floodlight, Threaded Knuckle	150W HID	7,300	54W	4000K	120-277V	Dark Bronze	No	Yes	180
TFX2 LED 40K MVOLT IS DDBXD	193047670241	LED Floodlight, Slipfitter	250W HID	13,200	94W	4000K	120-277V	Dark Bronze	No	Yes	45
TFX2 LED 40K MVOLT YK DDBXD	193047670234	LED Floodlight, Yoke	250W HID	13,200	94W	4000K	120-277V	Dark Bronze	No	Yes	63
TFX2 LED 50K MVOLT YK DDBXD	193048041552	LED Floodlight, Yoke	250W HID	13,200	94W	5000K	120-277V	Dark Bronze	No	Yes	63

TFX3

TFX4

Lithonia Lighting®

TFX3 | TFX4

LED Floodlight

The TFX LED floodlight family is an industry-leading distributor stock solution, providing cost-effective and energy-efficient solutions to replace HID floodlights. In addition, payback can be achieved in less than two years, due to DLC Premium listing and 140 lumens per watt efficacy. Comes in four sizes, delivering up to 41,000 lumens, making TFX the ideal solution to replace 70W to 400W HID luminaires.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC Premiun	Pallet Quantity
TFX3 LED 40K MVOLT IS DDBXD	193047670265	LED Floodlight, Slipfitter	400W HID	25,600	188W	4000K	120-277V	Dark Bronze	No	Yes	24
TFX3 LED 40K MVOLT YK DDBXD	193047670258	LED Floodlight, Yoke	400W HID	25,600	188W	4000K	120-277V	Dark Bronze	No	Yes	36
TFX4 LED 40K MVOLT IS DDBXD	193047670302	LED Floodlight, Slipfitter	1000W HID	41,000	296W	4000K	120-277V	Dark Bronze	No	Yes	16
TFX4 LED 40K MVOLT YK DDBXD	193047670326	LED Floodlight, Yoke	1000W HID	41,000	296W	4000K	120-277V	Dark Bronze	No	Yes	20

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

Lithonia Lighting®

ESX LED

Area Luminaire

The ESX LED area luminaire provides the combination of best product value, at the best price and best delivery. ESX is ideal for one-for-one replacement of HID area lighting and provides up to 76% energy savings, long service life and fast payback. Providing the perfect combination of performance packages, optics, CCT, voltage options and finish to address the HID replacement market needs, ESX also features the versaility of adjustable light output by providing two light levels from within one product allowing greater flexibilty while helping reduce inventory costs.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens (Adjustable)	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
ESX1 LED P2 40K R3 MVOLT UPA BLS DDBXD M2	194994838302	LED Area Luminaire	150W-250W HID	8,000-14,000	50W-98W	4000K	120-277V	Dark Bronze	No	Yes	80
ESX1 LED P4 40K R3 MVOLT UPA BLS DDBXD M2	194994838340	LED Area Luminaire	400W HID	21,000-25,000	146W-190W	4000K	120-277V	Dark Bronze	No	Yes	80
ESX1 LED P2 50K R3 MVOLT UPA BLS DDBXD M2	194994838555	LED Area Luminaire	150W-250W HID	8,000-14,000	50W-98W	5000K	120-277V	Dark Bronze	No	Yes	80
ESX1 LED P4 50K R3 MVOLT UPA BLS DDBXD M2	194994838531	LED Area Luminaire	400W HID	21,000-25,000	146W-190W	5000K	120-277V	Dark Bronze	No	Yes	80

Lithonia Lighting®

BarnGuard

Security Lights

The Lithonia Lighting® BarnGuard LED delivers the lumens you need at a low price you want, resulting in cost-effective installations with a fast payback and the best safety appeal. Two packages of 4,700 and 7,900 lumens can replace up to 250W HID barn lights. MVOLT (120V through 277V) input, a detachable drop lens, and an optional arm mount accessory give you the flexibility to fulfil the needs of any application.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	DLC	Pallet Quantity
BGR LED P1 40K MVOLT PER DNA M2	194994252542	LED Security Light, Twist-Lock Photocell	175W Mercury Vapor	4,700	36W	4000K	120-277V	Natural Aluminum	Yes	Yes	96
BGR LED P2 40K MVOLT PER DNA M2	194994252559	LED Security Light, Twist-Lock Photocell	250W HID	7,900	56W	4000K	120-277V	Natural Aluminum	Yes	Yes	96
BGR LED P2 50K MVOLT PER DNA M2	194994252573	LED Security Light, Twist-Lock Photocell	250W HID	7,900	56W	5000K	120-277V	Natural Aluminum	Yes	Yes	96

Lithonia Lighting®

OVFL

LED Security Floodlight

The OVFL LED floodlights are perfect for residential and multi-family applications requiring an economical solution. The OVFL 2RH features two heads allowing for more flexibility in application versus single head solutions. The standard photocell offers a no-hassle solution for any application requiring reliable dusk-to-dawn security lighting.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	Pallet Quantity
OVFL LED 2RH 40K 120 PE DDB M4	191848261101	Value LED Security Floodlight with Photocell	2-Head PAR38 150W Incandescent	1,770	20W	4000K	120V	Dark Bronze	Yes	384
OVFL LED 2RH 40K 120 PE WH M4	889804851038	Value LED Security Floodlight with Photocell	2-Head PAR38 150W Incandescent	1,770	20W	4000K	120V	White	Yes	384

Lithonia Lighting®

OLF

LED Security Floodlight

The OLF family provides a multitude of control options, including motion sensor and photocell, to meet the security needs of your residential single and multi-family applications.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	Photocell Included	Pallet Quantity
OLF 2RH 40K 120 MO DDB M6	191848797938	LED Security Floodlight with Motion Sensor	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	Dark Bronze	Yes	216
OLF 2RH 40K 120 MO WH M6	820476314636	LED Security Floodlight with Motion Sensor	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	White	Yes	216
OLF 2RH 40K 120 DDB M4	191848797921	LED Security Floodlight	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	Dark Bronze	No	252
OLF 2RH 40K 120 PE DDB M4	191848261163	LED Security Floodlight with Photocell	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	Dark Bronze	Yes	288
OLF 2RH 40K 120 PE WH M4	889804043723	LED Security Floodlight with Photocell	2-Head PAR38 90W Incandescent	2,200	25W	4000K	120V	White	Yes	288

Lithonia Lighting®

CNY

LED Canopy

The CNY LED canopy luminaire is a versatile and energy-efficient solution for replacing up to 400W HID luminaires. CNY LED provides a great, cost-effective canopy lighting solution ideal for applications such as walkways, schools, and strip malls.

Ordering Information

Catalog Number	UPC	Description	Replaces Up To	Lumens	Input Watts	CCT	Voltage	Finish	DLC Premium	Pallet Quantity
CNY LED P1 40K MVOLT DDB M4	191848093320	LED Canopy Luminaire	150W HID	4,800	35W	4000K	120-277V	Dark Bronze	Yes	96
CNY LED P2 40K MVOLT DDB M4	191848093344	LED Canopy Luminaire	250W HID	6,300	52W	4000K	120-277V	Dark Bronze	Yes	96

Smart and simple selection
to make your job easier.

Controls

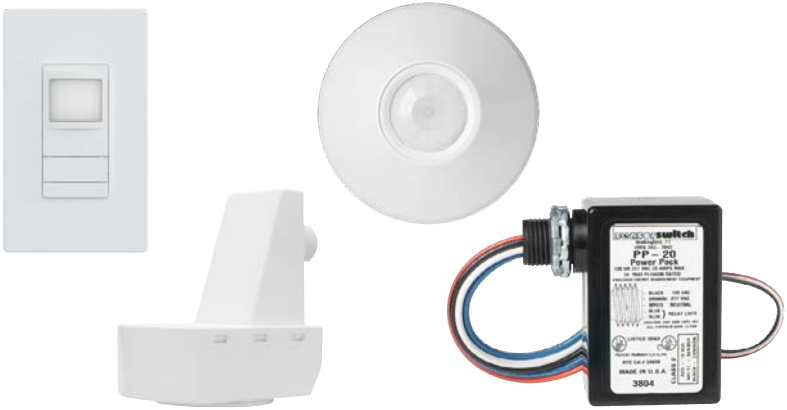

SensorSwitch™

WPD

Phase Dimmer Switch

The SensorSwitch WPD Forward-Phase Dimmer Switch is a commercial and residential grade paddle dimmer that works with most dimmable incandescent, LED and CFL lamp fixtures. Easy configuration allows the user or installer to effortlessly develop energy saving strategies by setting high and low brightness levels or returning to its default state when desired. Can be used with single-pole or 3-way control with a regular on/off mechanical switch (sold separately).

Ordering Information

Catalog Number	UPC	Description	Detection Type	Coverage	Voltage Type	Color	Voltage	Pallet Quantity
WPD WH	194994217374	Phase Dimmer Wall Switch	N/A	N/A	VAC	White	120V	100

SensorSwitch™

WSXA Series

Wall Switch Sensor with Occupancy Detection and Daylighting

The SensorSwitch WSXA Series offers small motion detection up to 20ft (6.10m) and is programmable with VLP Mobile App or traditional push button. Features mis-wire protection with interchangeable line and load wires to prevent damage to the device, and integrated photocell with Adaptive Daylight Harvesting (ADH). Convertible neutral to ground accommodates powering over ground or neutral connection in one device. Compatible with electronic & magnetic ballasts, LED, CFL and incandescent fixtures.

Ordering Information

Catalog Number	UPC	Description	Detection Type	Coverage	Voltage Type	Color	Voltage	Pallet Quantity
WSXA WH	194994625902	Wall Switch Sensor	Passive Inrered (PIR)	N/A	Line	White	120-277V	100

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

SensorSwitch™

SPODMRA Series

Dimming Switch with Multi-Way

The SensorSwitch sPODMRA Series is a push-button dimming switch with multi-way (MWO), allowing you to connect up to 9 devices with neutral wiring or up to 2 devices without neutral wiring on a single traveler. Wall switches can be spaced up to 250 feet apart. Compatible with 0-10V dimming luminaries. Programmable without removing the switch plate.

c UL us LISTED

Ordering Information

Catalog Number	UPC	Description	Detection Type	Coverage	Voltage Type	Color	Voltage	Pallet Quantity
SPODMRA MWO D WH	194994788584	Wall Switch	N/A	0-10V	Line	White	120-277V	100

SensorSwitch™

CM | CMR

Ceiling Mount Sensors

Ceiling mounted occupancy sensors offer amazing performance sensitivity to small & large motions for a standard range Passive Infrared (PIR) sensor or optional Passive Dual Technology (PDT) detection options. It is suitable for offices, conference rooms, restrooms, warehouses, cafeterias, classrooms and corridors.

Ordering Information

Catalog Number	UPC	Description	Detection Type	Coverage	Voltage Type	Color	Voltage	Pallet Quantity
CM 9	745975808304	Ceiling Mount Sensor	Passive Infrared (PIR)	Small Motion 360°	Low	White	12-24V	96
CMR 9	745975808281	Ceiling Mount Sensor	Passive Infrared (PIR)	Small Motion 360°	Line	White	120-277V	96
CMR 10	745975808250	Ceiling Mount Sensor	Passive Infrared (PIR)	Large Motion 360°	Line	White	120-277V	96
CMR PDT 9	745975809448	Ceiling Mount Sensor	Passive Dual Technology (PDT)	Small Motion 360°	Line	White	120-277V	96

The Contractor Select program offers our most popular product configurations. Additional product configurations are available. Please see acuitybrands.com for more information.

SensorSwitch™

LSXR 610

Fixture Interchangeable Lens Sensor

The LSXR fixture mounted occupancy sensor provides 360-degree control for fixtures mounted in commercial and industrial lighting control applications. The sensor incorporates the industry's leading passive infrared (PIR) technology which monitors changes in infrared energy given off by occupants as they move within the field-of-view. With four available interchangeable lenses, the LSXR is suitable for auditoriums, cafeterias, classrooms, conference rooms, corridors, gymnasiums, private offices, restrooms, stairwells and warehouses.

Ordering Information

Catalog Number	UPC	Description	Detection Type	Coverage	Voltage Type	Color	Voltage	Pallet Quantity
LSXR 610	820476095115	Fixture Mount Sensor	Passive Infrared (PIR)	High & Low Mount 360°	Line	White	120-277V	96

LSXR fixture mounted sensors are programmable with the SensorSwitch VLP mobile app

c UL us LISTED

SensorSwitch™

PP20

Power Pack

The PP20 power pack works with low voltage occupancy sensors to switch lighting loads on and off in addition to transforming 120, 240, or 277 VAC single phase power to Class II 15VDC to power remote sensors. When combined with a low voltage occupancy sensor, the PP20 power pack enables you to implement multiple sensors into larger areas, such as a commercial office space, where additional sensor coverage is needed.

Ordering Information

Catalog Number	UPC	Description	Voltage Type	Color	Voltage	Pallet Quantity
PP20	745975809592	Power Pack	Line	Black	120-277V	100

LIGHTQUICK®
DELIVERING ON-TIME SOLUTIONS

LightQuick™

Easy Ordering. Fast Shipping. Local Manufacturing.

When project timelines are tight, count on Acuity Brands to have the most popular lighting and controls products in one of our six Regional Manufacturing and Distribution Centers (RMDCs) strategically located around North America.

Broad Portfolio of Products

LightQuick™ Stock

- Hundreds of products are in stock and available for same-day shipment or will-call pickup.
- Orders placed by noon will ship same day. Orders placed after noon will ship next day.[1]

LightQuick Made-To-Order

- Products are configured locally.
- Thousands of products can be modified for shipment in 2 days or less.[2,3]

Service & Logistic Capabilities

Rapid Response From Local Customer Care

Our customer care teams are located on-site in our RMDCs allowing us to provide distributors and contractors with quick answers and resolutions to even the most complicated manufacturing and logistic situations.

Customized Solutions to Meet Unique Project Requirements

No two projects are alike and neither are the products and solutions needed to service them. We can tailor our manufacturing and logistic capabilities to meet even your most complex customer requirements.

[1] Time zone based on location of RMDC | [2] Available to specific markets | [3] Quantities limited to 100 per SKU

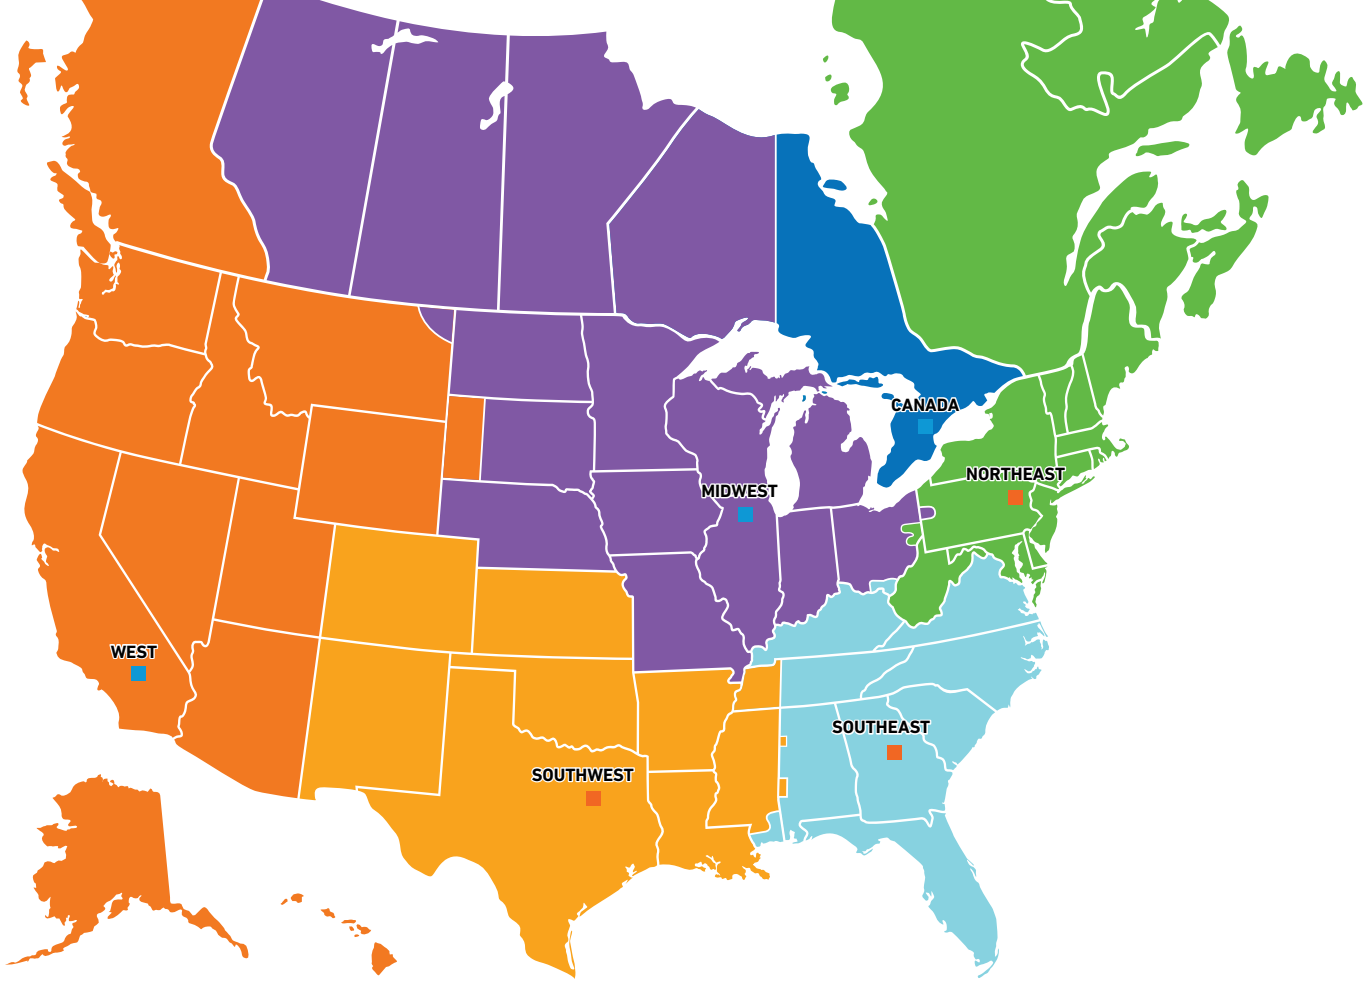

Regional Manufacturing and Distribution Center

Regional Distribution Center

DesignLights Consortium®

The DesignLights Consortium (DLC) is a non-profit organization promoting high–quality, energy–efficient lighting products in collaboration with utilities and energy–efficiency program members, manufacturers, lighting designers, and federal, state, and local entities.

To find out more about DLC and which Acuity Brands® products are listed, visit www.designlights.org/QPL.

To find DLC qualified products in this catalog, look for the DLC badge.

California Title 24

California Title 24, v2019 went into effect on January 1, 2020.

For more information on Title 24, visit www.energy.ca.gov/title24/2019standards

Contact your local Acuity Brands sales representative for more information.

ENERGY STAR®

ENERGY STAR is a joint program of the U.S. Environmental Protection Agency and the U.S. Department of Energy helping us all save money and protect the environment through energy-efficient products and practices.

Visit www.energystar.gov for more information.

IP65

IP65 refers to the product's ability to resist ingress of dust; it's also protected against jets of water from any direction.

IP66

IP66 refers to the product's ability to resist ingress of dust; it's also protected against heavy seas or powerful jets in harmful quantities.

Wet Location

A wet location is one in which water may drip, splash, or flow on or against electrical equipment. This icon indicates that the fixture was engineered so that water cannot enter or accumulate in the wireway, lampholders or other electrical parts.

Damp Location

Whether exterior or interior, a damp location is one that is normally or periodically subject to condensation or moisture in, on, or adjacent to electrical equipment. This icon indicates fixtures that were designed to tolerate damp environments.

Contractor Connect Webpage

The Acuity Brands Contractor Connect Webpage is your one-stop shop for tools and lighting resources to help grow your business.

- Direct links to our contractor programs including LightQuick®, Design2Ship® and Contractor Select™
- Virtual Tools and Resources
- Installation Videos
- Buy America(n) Information
- Contractor Corner Newsletter Registration

www.acuitybrands.com/contractor-resources

Have You Tried Our New DLC® & Local Rebate Search Tool?

Use our new search tool to find Acuity Brands products on the DesignLights Consortium® (DLC) Qualified Products List. You can even calculate the estimated lighting rebate dollars available in your area!

Start searching at
www.acuitybrands.com/DLCandRebates

ACUITY ACADEMY

Your Pathway to Learning Starts Here

Acuity Academy

Whether you are looking to enroll in instructor-led training, take an eLearning course or watch recorded webinars, Acuity Academy is accessible 24/7/365.

www.acuitybrands.com/acuityacademy

CS

CONTRACTOR SELECT™

LITHONIA LIGHTING®

JUNO®

sensorswitch®

IOTA®

www.contractorselect.com

One Lithonia Way, Conyers, Georgia 30012 | Phone: 800.922.9641

©2021 Acuity Brands Lighting, Inc. All rights reserved. | LL_7655_0621

AcuityBrands.